






# **Continuous motion** Vertical Form-Fill-Seal machine



This economical continuous VFFS offers Exceptional cost/performance ratio and less footprint required.

#### Horizontal seal mechanism

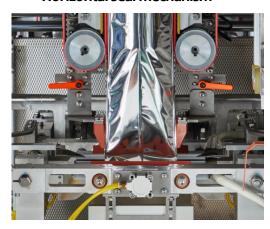

Servo-driven horizontal seal up / down mechanism contributes to stable sealing even at high speed operation. Bite detection function can reduce product loss.

#### Vertical seal mechanism



Stable sealing is achieved by adopting servo-driven film feeding roller built-in vertical seal unit.

### **Special Bag Shape**




By installing a hem folding device (option), it is possible to make bag with Hem seal.


#### **Machine Specification**

Bag types		Pillow, Gusset, Block-bottom Gusset, Chain bag etc
Bag size range	Width	80 – 250mm
	Length	80–300mm
Bag material		Various laminated film
Packaging speed		Max 140 bpm (Empty bag), 70bpm(Gusset bag)
Power supply		3-phase 200V 50/60 Hz Approx. 12.6kVA
Power consumption		5.4Kw
Air consumption		6oL(Normal)/ min
Machine dimension		W 1,200mm x D1,955mm x H1,575 mm
Machine weight		Approx. 700kg
Option		Hem folding device (See attached photo),
		Auger filler, Gas filling, Thermal printer etc.

The above specification varies depend on material, products bag type etc.

## **Bag types**

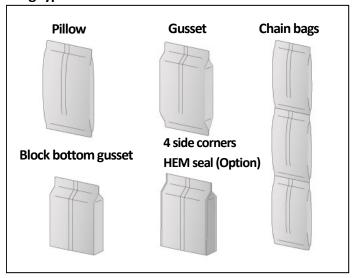

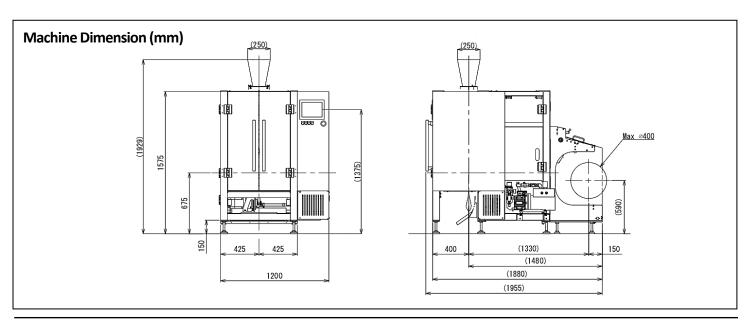

# Tokyo Automatic Machinery Works, Ltd.

TOJIKI BLDG.,3-10-7 lwamotocho,Chiyoda-Ku,Tokyo 101-0032 Japan TEL: 81-3-3866-4824 FAX: 81-3-3866-7150

URL: http://www.tam-tokyo.co.jp/ E-mail: tam-overseas@tam-tokyo.co.jp