





Bottle Coolers

- ▶ Single Door Bottle Coolers
- ▶ Double Door Bottle Coolers
- ▶ Triple Door Bottle Coolers
- ▶ Sliding Door Bottle Coolers
- ▶ Wooden Shelf Bottle Coolers
- ▶ Chest Bottle Coolers

Bottle Coolers

Single Door Bottle Coolers



USS 60 DTKL

- ▶ Fan assisted cooling
- ▶ LED light
- ▶ Glass door
- ▶ 2 fixed shelves
- ▶ Adjustable feet



USS 15 DTKL

- ▶ Fan assisted cooling
- ▶ LED light
- ▶ Glass Door
- ▶ Adjustable feet



Quick installation at the point of sale



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 15 DTKL	USS 60 DTKL
Daily Energy Consumption (kWh/24h)	0,760	1,0
Gross Volume (l)	19	58,4
Climate Class	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50
Power (W)	150	250
Refrigerant Gas	HC	HC
Control	Mechanic	Mechanic
Evaporator Fan	Yes	Yes
Automatic Defrost	No	No
Internal Light	Yes	Yes
Canopy Light	Yes	Yes
DIMENSIONS		
W x D x H (mm) without packaging	295x366x573	455x475x715
W x D x H (mm) with packaging	375x420x655	530x540x840
Weight without Packaging (kg)	19	32,5
Weight with Packaging (kg)	20,5	37
LOADING CAPACITY		
Containers 20'	258	88
Containers 40'	528	176
Containers 40' HC	704	300

Bottle Coolers

Single Door Bottle Coolers



US\$ 95 DTK Premium

- ▶ Appealing Design
- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Glass Door
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 95 DTK

- ▶ Fan assisted cooling
- ▶ LED Light
- ▶ Glass Door
- ▶ Adjustable Shelves
- ▶ Adjustable Feet



USS 95 DTKL

- ▶ Fan assisted cooling
- ▶ LED Light
- ▶ Glass Door
- ▶ Adjustable Shelves
- ▶ Adjustable Feet



Quick installation at the point of sale



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 95 DTK Premium	USS 95 DTK	USS 95 DTKL
Daily Energy Consumption (kWh/24h)	1,1	1,33	1,1
Gross Volume (l)	88	88	88
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	250	250	250
Refrigerant Gas	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	No
Internal Light	Yes	Yes	Yes
Canopy Light	No	No	Yes
DIMENSIONS			
W x D x H (mm) without packaging	480x516x895	480x530x870	480x520x840
W x D x H (mm) with packaging	585x595x1055	560x600x960	560x600x960
Weight without Packaging (kg)	40	37,5	37,5
Weight with Packaging (kg)	50	43	43
LOADING CAPACITY			
Containers 20'	72	72	72
Containers 40'	160	160	160
Containers 40' HC	184	184	184

Bottle Coolers

Single Door Bottle Coolers

USS 175 DTK Premium

- ▶ Fan assisted cooling
- ▶ LED Light
- ▶ Glass Door
- ▶ Adjustable shelves
- ▶ Adjustable feet





USS 160 DTK



USS 175 DTK



USS 175 DTKL



Quick installation at the point of sale



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 160 DTK	USS 175 DTK	USS 175 DTKL	USS 175 DTK Premium
Daily Energy Consumption (kWh/24h)	1,45	2,27	2,65	2,27
Gross Volume (l)	154	190	190	194
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	250	200	200	200
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	No	No	Yes	No
DIMENSIONS				
W x D x H (mm) without packaging	595x516x870	435x500x1833	435x460x2013	435x529x1910
W x D x H (mm) with packaging	640x570x1000	500x560x1990	475x540x2050	505x630x1960
Weight without Packaging (kg)	42	64	70	64
Weight with Packaging (kg)	53	71	76	71
LOADING CAPACITY				
Containers 20'	74	44	48	24
Containers 40'	152	96	100	54
Containers 40' HC	152	96	100	60

Bottle Coolers

Single Door Bottle Coolers



USS 220 DTK Premium

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Glass Door
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 220 DTK BK

USS 220 DTK

USS 220 DTKL

USS 220 DTKLE *



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 220 DTK BK	USS 220 DTK Premium	USS 220 DTK	USS 220 DTKL	USS 220 DTKLE
Daily Energy Consumption (kWh/24h)	1,679	1,045	1,90	1,95	2,05
Gross Volume (l)	227	227	227	227	227
Climate Class	4	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	-1/+5	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	220	220	220	220	220
Refrigerant Gas	HC	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes	Yes
Canopy Light	No	No	No	Yes	Yes
DIMENSIONS					
W x D x H (mm) without packaging	595x640x1310	595x665x1426	595x640x1310	595x640x1435	595x640x1435
W x D x H (mm) with packaging	630x670x1400	665x685x1560	630x670x1400	630x670x1530	630x670x1530
Weight without Packaging (kg)	52	64	58	61	61
Weight with Packaging (kg)	58	71	65	68	68
LOADING CAPACITY					
Containers 20'	27	24	27	27	27
Containers 40'	57	54	57	57	57
Containers 40' HC	57	54	57	57	57

* USS 220 DTKLE is the economic version of USS 220 DTKL. Door frames are produced with plastic.

Bottle Coolers

Single Door Bottle Coolers



USS 275 DTK Premium

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 275 DTK



USS 275 DTKL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 275 DTK	USS 275 DTKL	USS 275 DTK Premium
Daily Energy Consumption (kWh/24h)	2,05	3,03	3,03
Gross Volume (l)	312	312	312
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	270	270	270
Refrigerant Gas	HC	HC	HC
Control	Mechanic	Mechanic	Electronic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	Yes
Internal Light	Yes	Yes	Yes
Canopy Light	No	Yes	No
DIMENSIONS			
W x D x H (mm) without packaging	500x640x1840	500x640x2013	587x591x1833
W x D x H (mm) with packaging	530x660x1950	530x660x2150	640x640x1970
Weight without Packaging (kg)	70	76	85
Weight with Packaging (kg)	81	93	97
LOADING CAPACITY			
Containers 20'	37	37	37
Containers 40'	76	76	54
Containers 40' HC	76	76	63

Bottle Coolers

Single Door Bottle Coolers



USS 300 DTK Premium

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



**USS 300
DTK BK**

**USS 300
DTK**

**USS 300
DTKL**

**USS 330
DTK Lean**

**USS 330
DTKL Lean**



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 300 DTK BK	USS 300 DTK Premium	USS 300 DTK	USS 300 DTKL	USS 330 DTK Lean	USS 330 DTKL Lean
Daily Energy Consumption (kWh/24h)	1,697	2,150	2,0	2,05	1,82	1,9
Gross Volume (l)	305	305	305	305	358	358
Climate Class	4	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	-1/+5	0/+7	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Power (W)	300	300	300	300	370	370
Refrigerant Gas	HC	HC	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes	Yes	Yes
Canopy Light	No	No	No	Yes	No	Yes
DIMENSIONS						
W x D x H (mm) without packaging	595x640x1640	595x665x1720	595x640x1640	595x640x1780	595x607x1795	595x607x1946
W x D x H (mm) with packaging	630x670x1810	665x685x1820	630x670x1810	630x670x1950	630x670x1835	630x670x1985
Weight without Packaging (kg)	59	80	68	74	60	61,5
Weight with Packaging (kg)	65	88	74	80	66	65,5
LOADING CAPACITY						
Containers 20'	27	24	27	27	27	27
Containers 40'	57	54	57	57	57	57
Containers 40' HC	57	54	57	57	57	57

Bottle Coolers

Single Door Bottle Coolers



USS 374 DTK Premium

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 374 DTK BK



USS 374 DTK



USS 374 DTKE



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights




Special area for your brand

GENERAL CHARACTERISTICS	USS 374 DTK BK	USS 374 DTK Premium	USS 374 DTK	USS 374 DTKE
Daily Energy Consumption (kWh/24h)	1,794	1,57	1,7	2,2
Gross Volume (l)	358	358	358	358
Climate Class	4	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	-1/+5	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	370	370	370	370
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	No	No	No	No
DIMENSIONS				
W x D x H (mm) without packaging	595x640x1840	595x665x1920	595x640x1840	595x600x1840
W x D x H (mm) with packaging	630x670x1920	670x710x2080	610x660x1920	610x660x1920
Weight without Packaging (kg)	64	74	74	75,5
Weight with Packaging (kg)	70	81	81	84,9
LOADING CAPACITY				
Containers 20'	27	27	27	27
Containers 40'	57	57	57	57
Containers 40' HC	57	57	57	57

Bottle Coolers

Single Door Bottle Coolers

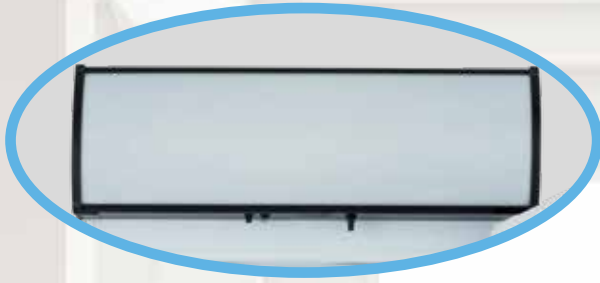

Clear Area For Your Brand



USS 374 DTKL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 374 DTKL SZ



USS 374 DTKLB



USS 374 DTKLE *



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 374 DTKL	USS 374 DTKL SZ	USS 374 DTKLB	USS 374 DTKLE
Daily Energy Consumption (kWh/24h)	1,75	4,25	1,75	2,25
Gross Volume (l)	358	358	372	358
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	-2,5/+1	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	370	370	370	370
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Electronic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	Yes	No	No
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	Yes	Yes	Yes	Yes
DIMENSIONS				
W x D x H (mm) without packaging	595x640x1980	595x640x1980	595x640x1980	595x640x1980
W x D x H (mm) with packaging	670x710x2150	630x670x2060	630x670x2060	630x670x2060
Weight without Packaging (kg)	80,4	80	83	78
Weight with Packaging (kg)	90	90	90	85
LOADING CAPACITY				
Containers 20'	24	27	27	27
Containers 40'	54	57	57	57
Containers 40' HC	54	57	57	57

* USS 374 DTKLE is the economic version of USS 374 DTKL. Door frames are produced with plastic.

Bottle Coolers

Single Door Bottle Coolers



USS 380 DTKL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 420 DTK

USS 420 DTK Lean

USS 440 DTKL

USS 440 DTKLB



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights




Special area for your brand

GENERAL CHARACTERISTICS	USS 380 DTKL	USS 420 DTK	USS 420 DTK Lean	USS 440 DTKL	USS 440 DTKLB
Daily Energy Consumption (kWh/24h)	1,733	2,6	2,55	3,62	3,68
Gross Volume (l)	398	441	416	469	500
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	370	370	370	390	390
Refrigerant Gas	HC	HC	HC	HC	HC
Control	Electronic	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes	Yes
Automatic Defrost	Yes	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes	Yes
Canopy Light	Yes	No	No	Yes	Yes
DIMENSIONS					
W x D x H (mm) without packaging	595x620x2015	595x670x2018	595x670x2018	680x655x2090	680x655x2090
W x D x H (mm) with packaging	630x670x2150	630x680x2190	630x680x2190	760x705x2230	760x705x2230
Weight without Packaging (kg)	92	98	86	101	100
Weight with Packaging (kg)	100	109	97	112	111
LOADING CAPACITY					
Containers 20'	27	27	27	24	24
Containers 40'	57	57	57	51	51
Containers 40' HC	57	57	57	57	57

Bottle Coolers

Single Door Bottle Coolers

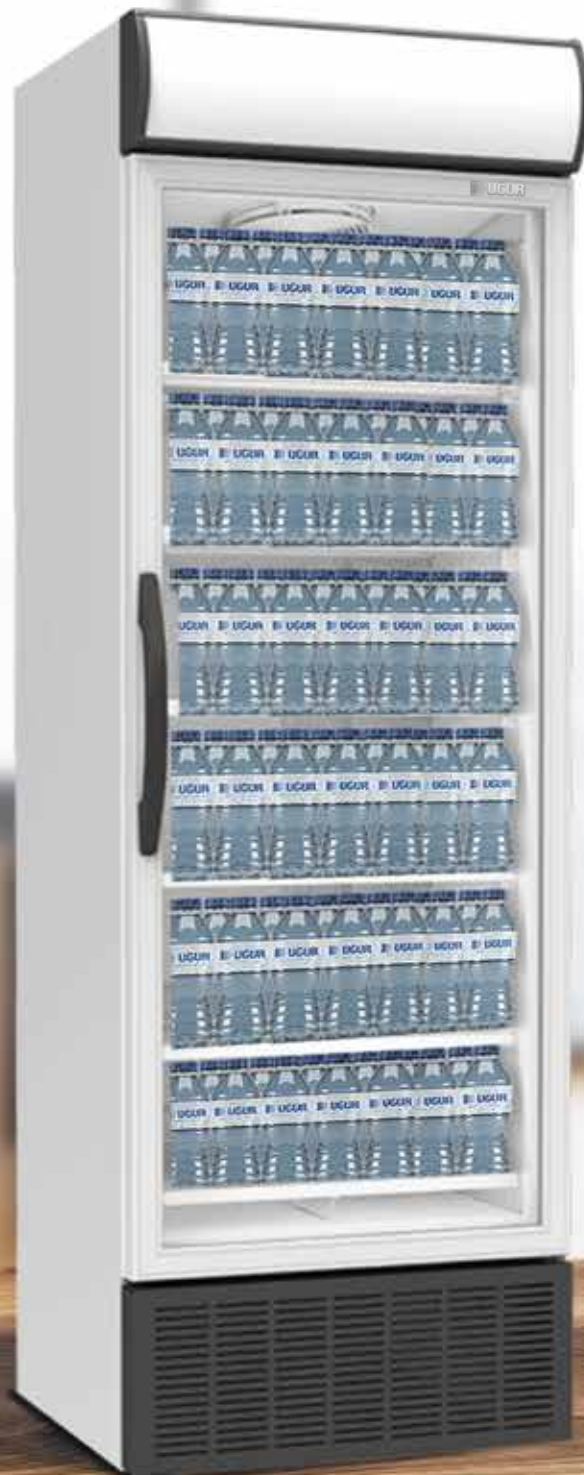

USS 500 DTKL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 690 DTKL



USS 690 DTKL BK



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 500 DTKL	USS 690 DTKL	USS 690 DTKL BK
Daily Energy Consumption (kWh/24h)	4,875	4,260	1,90
Gross Volume (l)	493	680	680
Climate Class	4/CC2	4/CC2	4
Operating Temperature Range (°C)	0/+7	0/+7	-1/+5
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	390	550	325
Refrigerant Gas	HC	HC	HC
Control	Mechanic	Mechanic	Electronic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	Yes
Internal Light	Yes	Yes	Yes
Canopy Light	Yes	Yes	Yes
DIMENSIONS			
W x D x H (mm) without packaging	680x655x2090	780x705x2130	780x762x2150
W x D x H (mm) with packaging	760x705x2207	850x755x2260	850x755x2260
Weight without Packaging (kg)	115	123	123
Weight with Packaging (kg)	124	136	136
LOADING CAPACITY			
Containers 20'	24	18	14
Containers 40'	51	42	30
Containers 40' HC	57	47	30

Bottle Coolers

Single Door Bottle Coolers



USS 810 DTK

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 700 DTK



USS 700 DTKL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 700 DTK	USS 700 DTKL	USS 810 DTK
Daily Energy Consumption (kWh/24h)	5,11	5,11	4,64
Gross Volume (l)	735	697	746
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	550	550	650
Refrigerant Gas	HC	HC	HC
Control	Electronic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	No
Internal Light	Yes	Yes	Yes
Canopy Light	No	Yes	No
DIMENSIONS			
W x D x H (mm) without packaging	780x705x2205	780x705x2180	810x669x2197
W x D x H (mm) with packaging	795x710x2320	795x710x2210	825x710x2320
Weight without Packaging (kg)	140,5	132	143
Weight with Packaging (kg)	151	140	154
LOADING CAPACITY			
Containers 20'	21	18	21
Containers 40'	45	42	42
Containers 40' HC	57	48	48

Bottle Coolers

Double Door Bottle Coolers



USS 190 D2KL

Bottle Cooler

- ▶ Fan assisted cooling
- ▶ LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 374 D2K
Bottle Cooler



USS 374 D2KL
Bottle Cooler



Custom design according to customer needs
Color options available



Environmental friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 190 D2KL	USS 374 D2K	USS 374 D2KL
Daily Energy Consumption (kWh/24h)	2,2	2,3	2,25
Gross Volume (l)	88+88	358	358
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	500	370	370
Refrigerant Gas	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	No
Internal Light	Yes	Yes	Yes
Canopy Light	Yes	No	Yes
DIMENSIONS			
W x D x H (mm) without packaging	965x545x840	595x640x1840	595x640x1980
W x D x H (mm) with packaging	n/a	630x670x1920	630x670x2060
Weight without Packaging (kg)	73	80,4	79
Weight with Packaging (kg)	83	90,1	86
LOADING CAPACITY			
Containers 20'	n/a	27	27
Containers 40'	n/a	57	57
Containers 40' HC	n/a	57	57

Bottle Coolers

Double Door Bottle Coolers



USS 748 D2KL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable shelves
- ▶ Adjustable feet
- ▶ LED Canopy



USS 840 D2K Lean



USS 890 D2K



USS 890 D2KL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 748 D2KL	USS 840 D2K Lean	USS 890 D2K	USS 890 D2KL
Daily Energy Consumption (kWh/24h)	4,8	2,55x2	6,10	6,25
Gross Volume (l)	358x2	416x2	837	808
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	750	750	600	600
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Mechanic	Electronic	Electronic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	Yes	Yes
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	Yes	No	No	Yes
DIMENSIONS				
W x D x H (mm) without packaging	1200x640x1980	1200x670x2030	890x769x2004	890x792x1990
W x D x H (mm) with packaging	1270x690x2150	1250x685x2165	950x840x2140	950x840x2140
Weight without Packaging (kg)	154	178	160	147
Weight with Packaging (kg)	166	191	174	157
LOADING CAPACITY				
Containers 20'	13	13	14	14
Containers 40'	27	28	28	28
Containers 40' HC	27	28	28	28

Bottle Coolers

Double Door Bottle Coolers



USS 1000 D2KL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 1100 D2KL



USS 1200 D2K



USS 1200 D2KL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 1000 D2KL	USS 1100 D2KL	USS 1200 D2K	USS 1200 D2KL
Daily Energy Consumption (kWh/24h)	5,96	6,40	6,68	6,80
Gross Volume (l)	882	1114	1126	1082
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	960	960	900	900
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	Yes	Yes	No	Yes
DIMENSIONS				
W x D x H (mm) without packaging	1000x785x1990	1100x872x1990	1200x785x2007	1200x785x1990
W x D x H (mm) with packaging	1060x840x2160	1160x940x2160	1260x840x2140	1260x840x2140
Weight without Packaging (kg)	158	175	181	181
Weight with Packaging (kg)	169	195	201	201
LOADING CAPACITY				
Containers 20'	14	11	11	11
Containers 40'	28	23	23	23
Containers 40' HC				

Bottle Coolers

Double Door Bottle Coolers



USS 1500 D2K

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Adjustable shelves
- ▶ Adjustable feet



USS 1600 D2K



USS 1600 D2KL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 1500 D2K	USS 1600 D2K	USS 1600 D2KL
Daily Energy Consumption (kWh/24h)	3,95	6,150	6,35
Gross Volume (l)	1215	1323	1287
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	1000	1040	1040
Refrigerant Gas	HC	HC	HC
Control	Electronic	Electronic	Electronic
Evaporator Fan		Yes	Yes
Automatic Defrost	Yes	Yes	Yes
Internal Light	Yes	Yes	Yes
Canopy Light	Yes	No	Yes
	No		
DIMENSIONS			
W x D x H (mm) without packaging		1600x750x2090	1600x750x2073
W x D x H (mm) with packaging	1500x720x2044	1675x805x2124	1675x805x2124
Weight without Packaging (kg)	1675x805x2124	238	238
Weight with Packaging (kg)	208	262	262
	232		
LOADING CAPACITY			
Containers 20'		7	7
Containers 40'	7	14	14
Containers 40' HC	14	14	14

Bottle Coolers

Triple Door Bottle Coolers



USS 1500 D3K

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ 3 Glass Doors to be used as separate showcase
- ▶ Adjustable shelves
- ▶ Adjustable feet
- ▶ Big display area



USS 1600 D3KL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ 3 Glass Doors to be used as separate showcase
- ▶ Adjustable shelves
- ▶ Adjustable feet
- ▶ Big display area



Custom design according to customer needs.
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 1500 D3K	USS 1600 D3KL
Daily Energy Consumption (kWh/24h)	3,80	6,60
Gross Volume (l)	1178	1280
Climate Class	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50
Power (W)	1000	1040
Refrigerant Gas	HC	HC
Control	Electronic	Electronic
Evaporator Fan	Yes	Yes
Automatic Defrost	Yes	Yes
Internal Light	Yes	Yes
Canopy Light	No	Yes
DIMENSIONS		
W x D x H (mm) without packaging	1500x720x2044	1600x750x2073
W x D x H (mm) with packaging	1675x805x2124	1675x805x2124
Weight without Packaging (kg)	206,5	238
Weight with Packaging (kg)	211,5	262
LOADING CAPACITY		
Containers 20'	7	7
Containers 40'	14	14
Containers 40' HC	14	14


Bottle Coolers

Sliding Door Bottle Coolers



USS 100 DSCL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Sliding door
- ▶ Adjustable shelves
- ▶ Adjustable feet



**Sliding
Door**



USS 900 DSCL



USS 1000 DSC



USS 1000 DSCL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand



Sliding door

GENERAL CHARACTERISTICS	USS 100 DSCL	USS 900 DSCL	USS 1000 DSC	USS 1000 DSCL
Daily Energy Consumption (kWh/24h)	1,37	6,0	5,96	5,96
Gross Volume (l)	100	840	915	795
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	250	960	960	960
Refrigerant Gas	HC	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes	Yes
Automatic Defrost	No	No	No	No
Internal Light	Yes	Yes	Yes	Yes
Canopy Light	Yes	Yes	No	Yes
DIMENSIONS				
W x D x H (mm) without packaging	650x405x940	900x742x2102	1000x735x1990	1000x742x1990
W x D x H (mm) with packaging	720x460x1050	945x775x2260	1060x790x2160	720x460x1050
Weight without Packaging (kg)	45,5	780	163	163
Weight with Packaging (kg)	48	810	176	176
LOADING CAPACITY				
Containers 20'	80	18	14	14
Containers 40'	162	37	30	30
Containers 40' HC	162	37	30	30


Bottle Coolers

Sliding Door Bottle Coolers



US\$ 1100 DSCL

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Sliding door
- ▶ Adjustable shelves
- ▶ Adjustable feet



**Sliding
Door**



USS 1200 DSC



USS 1200 DSCL



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand



Sliding door

GENERAL CHARACTERISTICS	USS 1100 DSCL	USS 1200 DSC	USS 1200 DSCL
Daily Energy Consumption (kWh/24h)	6,40	6,80	8,62
Gross Volume (l)	1015	1122	967
Climate Class	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	0/+7	0/+7	0/+7
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	960	900	900
Refrigerant Gas	HC	HC	HC
Control	Mechanic	Mechanic	Mechanic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	No	No	No
Internal Light	Yes	Yes	Yes
Canopy Light	Yes	No	Yes
DIMENSIONS			
W x D x H (mm) without packaging	1100x822x1990	1200x735x1990	1200x742x1990
W x D x H (mm) with packaging	1150x870x2160	1260x840x2140	1260x790x2160
Weight without Packaging (kg)	171	174	164
Weight with Packaging (kg)	186	189	178
LOADING CAPACITY			
Containers 20'	12	11	11
Containers 40'	26	23	24
Containers 40' HC	30	26	31

Bottle Coolers

Wooden Shelf Bottle Coolers



USS 374 DTK ARS

- ▶ Fan assisted cooling
- ▶ Internal LED light
- ▶ Reversible Glass door (Optional)
- ▶ Adjustable wooden shelves
- ▶ Adjustable feet



USS 374 DTKB ARS



USS 374 DTK ARS BK



Custom design according to customer needs
Color options available



Environmentally friendly refrigerant



Better display with LED lights



Special area for your brand

GENERAL CHARACTERISTICS	USS 374 DTK ARS	USS 374 DTKB ARS	USS 374 DTK ARS BK
Daily Energy Consumption (kWh/24h)	1,955	1,955	1,79
Gross Volume (l)	358	372	358
Climate Class	4/CC2	4/CC2	4
Operating Temperature Range (°C)	+1/+9	+1/+9	-1/+5
Voltage/Frequency (V/Hz)	230/50	230/50	230/50
Power (W)	370	370	370
Refrigerant Gas	HC	HC	HC
Control	Electronic	Electronic	Electronic
Evaporator Fan	Yes	Yes	Yes
Automatic Defrost	Yes	Yes	Yes
Internal Light	Yes	Yes	Yes
Canopy Light	No	No	No
DIMENSIONS			
W x D x H (mm) without packaging	595x640x1840	595x640x1840	595x640x1840
W x D x H (mm) with packaging	670x710x1950	670x710x1950	670x710x1950
Weight without Packaging (kg)	74	74	65
Weight with Packaging (kg)	83,5	83,4	74,4
LOADING CAPACITY			
Containers 20'	24	24	24
Containers 40'	54	54	54
Containers 40' HC	54	54	54

Bottle Coolers

HV Ucool



Enhanced Visibility & Facing with Panoramic Display



Reduced Total Cost of Ownership



Identical Spare Parts through the Range



Stress-Free Technical Service



Lower Energy Consumption



Variable LED Options



Increased Robustness



Optimized Airflow Circulation



Reduced Total Cost of Ownership



USS 500 DTK HV UCOOL

USS 600 DTK HV UCOOL

USS 750 DTK HV UCOOL

USS 900 D2K HV UCOOL

GENERAL CHARACTERISTICS	USS 500 DTK HV UCOOL	USS 600 DTK HV UCOOL	USS 750 DTK HV UCOOL	USS 900 D2K HV UCOOL	USS 1200 D2K HV UCOOL	USS 1500 D3K HV UCOOL
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	+1/+10	+1/+10	+1/+10	+1/+10	+1/+10	+1/+10
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Power (W)	135	135	600	600	600	600
Refrigerant Gas	HC	HC	HC	HC	HC	HC

DIMENSIONS						
W x D x H (mm) without packaging	2143x500x701	2143x595x701	2143x750x701	2143x900x701	2143x1200x701	2143x1500x701
W x D x H (mm) with packaging	2280x565x800	2280x660x800	2280x815x800	2280x965x800	2280x1265x800	2280x1565x800
Liter (Gross/Net)	465/295	570/361	740/469	892/573	1144/783	1553/992

LOADING CAPACITY						
Containers 20'	28	23	14	14	11	7
Containers 40'	60	51	30	30	24	15
13.6 Truck	72	60	51	42	31	25



USS 1200 D2K HV UCOOL



USS 1500 D3K HV UCOOL

Bottle Coolers

Ucool



Enhanced Visibility & Facing with Panoramic Display



Lower Energy Consumption



Reduced Total Cost of Ownership



Variable LED Options



Identical Spare Parts through the Range



Increased Robustness



Stress-Free Technical Service



Optimized Airflow Circulation



Reduced Total Cost of Ownership



USS 500 DTK UCOOL



USS 600 DTK UCOOL



USS 750 DTK UCOOL



USS 900 D2K UCOOL

GENERAL CHARACTERISTICS	USS 500 DTK UCOOL	USS 600 DTK UCOOL	USS 750 DTK UCOOL	USS 900 D2K UCOOL	USS 1200 D2K UCOOL	USS 1500 D3K UCOOL
Climate Class	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2	4/CC2
Operating Temperature Range (°C)	+1/+10	+1/+10	+1/+10	+1/+10	+1/+10	+1/+10
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Refrigerant Gas	HC	HC	HC	HC	HC	HC

DIMENSIONS	USS 500 DTK UCOOL	USS 600 DTK UCOOL	USS 750 DTK UCOOL	USS 900 D2K UCOOL	USS 1200 D2K UCOOL	USS 1500 D3K UCOOL
W x D x H (mm) without packaging	2143x500x701	2143x595x701	2143x750x701	2143x900x701	2143x1200x701	2143x1500x701
W x D x H (mm) with packaging	2280x565x820	2280x660x820	2280x815x820	2280x965x820	2280x1265x820	2280x1565x820
Liter (Gross/Net)	435/273	533/334	692/434	835/530	1161/724	1453/917

LOADING CAPACITY	USS 500 DTK UCOOL	USS 600 DTK UCOOL	USS 750 DTK UCOOL	USS 900 D2K UCOOL	USS 1200 D2K UCOOL	USS 1500 D3K UCOOL
Containers 20'	28	23	14	14	11	7
Containers 40'	56	50	23	28	23	15
13.6 Truck	64	56	48	32	26	24



USS 1200 D2K UCOOL



USS 1500 D3K UCOOL