

Freezers & Conservators

- ▶ Chest Freezers
- ▶ Ice Cream Conservators
- ▶ Upright Freezers



UDD 500 BK



UDD 600 BK



Quick installation at the point of sale



Environmentally friendly refrigerant




Wheels optional

Block Covered
Storage Cabinet




GENERAL CHARACTERISTICS	UED 260 D/S	UED 360 D/S	UED 460 D/S	UDD 500 BK	UDD 600 BK
Daily Energy Consumption (kWh/24h)	0,58	0,70	0,85	2,468	3,284
Gross Volume (l)	190	280	387	484	667
Climate Class	C	C	C	C	C
Operating Temperature Range (°C)	-15/-25 +4//+6 -2/+3	-15/-25 +4//+6 -2/+3	-15/-25 +4//+6 -2/+3	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	90	110	110	249	360
Refrigerant Gas	HC	HC	HC	HC	HC
Number of Baskets	1	1	2	2	3
DIMENSIONS					
W x D x H (mm) without packaging	734x695x895	984x695x895	1284x695x895	11554x725x834	2059x725x834
W x D x H (mm) with packaging	790x720x965	1035x720x965	1315x720x965	1585x750x975	2095x750x975
Weight without Packaging (kg)	41,4	48,7	57,6	76	97,5
Weight with Packaging (kg)	44,1	52	61,9	94	118,5
LOADING CAPACITY					
Containers 20'	46	32	24	20	16
Containers 40'	94	66	50	44	34
Containers 40' HC	94	66	50	75	57

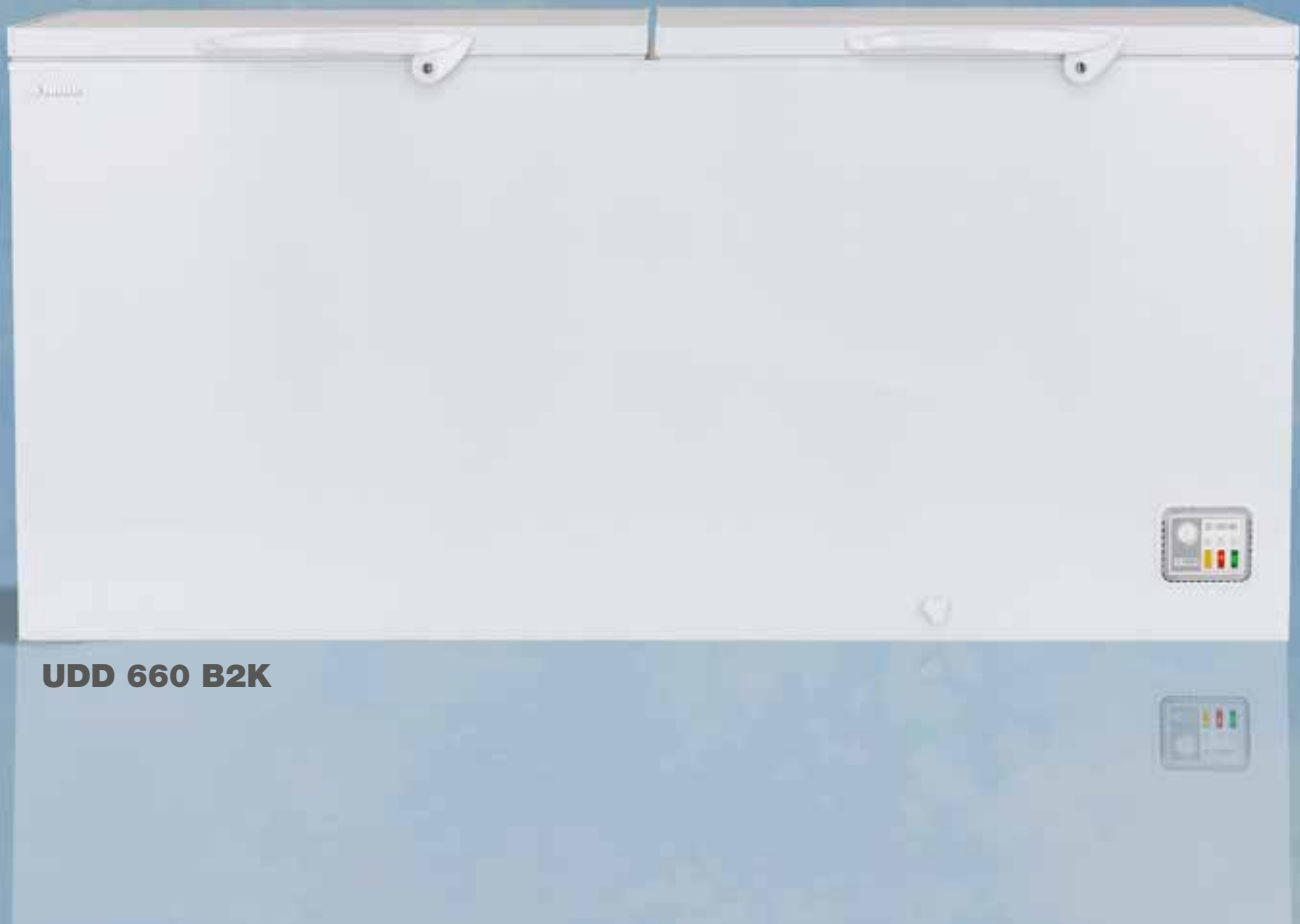


UDD 660 B2K

Block Covered
Storage Cabinet

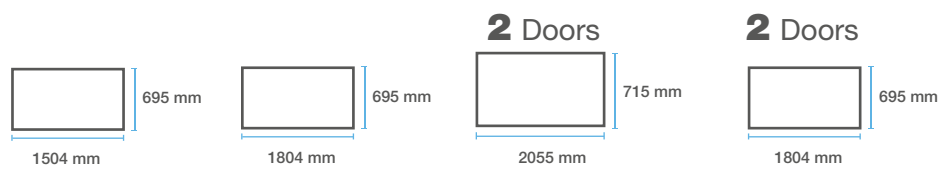

GENERAL CHARACTERISTICS	UDD 560 BK	UDD 660 BK	UDD 600 B2K	UDD 660 B2K
Daily Energy Consumption (kWh/24h)	2,98	3,61	3,284	3,61
Gross Volume (l)	469	565	667	565
Climate Class	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	250	280	360	280
Refrigerant Gas	HC	HC	HC	HC
Number of Baskets	2	3	3	3
DIMENSIONS				
W x D x H (mm) without packaging	1504x695x895	1804x695x895	2055x725x834	1804x695x895
W x D x H (mm) with packaging	1590x730x995	1890x730x995	2095x715x905	1890x730x995
Weight without Packaging (kg)	61	68	97,5	68
Weight with Packaging (kg)	66	73	118,5	73
LOADING CAPACITY				
Containers 20'	20	18	16	18
Containers 40'	44	36	34	36
Containers 40' HC	66	54	57	54

Flat
Sliding Glass

**UDD 200 SC****UDD 400 SC**

Quick installation at the point of sale







Environmentally friendly refrigerant







Wheels optional






Flat Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SC	UDD 200 SC	UDD 300 SC	UDD 400 SC
Daily Energy Consumption (kWh/24h)	1,27	1,67	1,85	2,20
Gross Volume (l)	109	188	291	395
Climate Class	B	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	122	147	179	212
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS				
W x D x H (mm) without packaging	568x568x897	724x635x892	1014x635x892	1304x635x892
W x D x H (mm) with packaging	600x600x970	800x750x910	1100x750x910	1400x750x910
Weight without Packaging (kg)	35	47	56	65
Weight with Packaging (kg)	43	58	70	80
LOADING CAPACITY				
Containers 20'	54	42	30	24
Containers 40'	102	88	64	50
Containers 40' HC	264	162	108	84

Flat Sliding Glass
Storage Cabinet**Slim**

GENERAL CHARACTERISTICS	UDD 500 SC	UDD 550 SC	UDD 600 SC	UDD 405 SC Slim
Daily Energy Consumption (kWh/24h)	2,70	4,30	5,0	1,938
Gross Volume (l)	484	555	662	327
Climate Class	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	287	355	380	200
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS				
W x D x H (mm) without packaging	1554x635x892	1754x635x892	2059x635x892	1304x505x950
W x D x H (mm) with packaging	1640x750x910	1845x750x910	2150x750x910	1330x530x975
Weight without Packaging (kg)	85	96	99	75
Weight with Packaging (kg)	101	114	120	90
LOADING CAPACITY				
Containers 20'	20	18	16	24
Containers 40'	44	38	32	54
Containers 40' HC	75	63	54	90

Flat Sliding Glass
Storage Cabinet

GENERAL CHARACTERISTICS	UDD 205 SC	UDD 305 SC	UDD 405 SC	UDD 505 SC	UDD 605 SC
Daily Energy Consumption (kWh/24h)	1,30	1,87	2,53	3,11	5,89
Gross Volume (l)	206	318	430	526	719
Climate Class	C	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	147	179	212	287	380
Refrigerant Gas	HC	HC	HC	HC	HC
DIMENSIONS					
W x D x H (mm) without packaging	724x635x950	1014x635x950	1304x635x950	1554x635x950	2059x635x950
W x D x H (mm) with packaging	800x750x910	1100x750x910	1330x750x910	1640x750x910	2150x750x910
Weight without Packaging (kg)	62	72	83	95	107
Weight with Packaging (kg)	77	87	98	110	122
LOADING CAPACITY					
Containers 20'	28	24	24	16	13
Containers 40'	64	50	54	38	31
Containers 40' HC	108	84	90	63	52

**UDD 400 SCB**

Quick installation at the point of sale




Environmentally friendly refrigerant



Wheels optional

Curved Sliding Glass Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCB	UDD 200 SCB	UDD 300 SCB	UDD 400 SCB	UDD 500 SCB	UDD 550 SCB
Daily Energy Consumption (kWh/24h)	1,27	1,67	1,85	2,20	2,70	4,30
Gross Volume (l)	114	197	304	411	504	578
Climate Class	B	C	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Power (W)	122	147	179	212	287	355
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS						
W x D x H (mm) without packaging	568x568x897	724x635x892	1014x635x892	1304x635x892	1554x635x892	1754x635x892
W x D x H (mm) with packaging	600x600x970	800x750x960	1100x750x960	1400x750x960	1640x750x960	1845x750x960
Weight without Packaging (kg)	35	47	56	65	85	96
Weight with Packaging (kg)	43	58	70	80	101	114
LOADING CAPACITY						
Containers 20'	54	42	30	24	20	18
Containers 40'	114	92	64	50	42	38
Containers 40' HC	264	108	108	84	72	63

**UDD 300 SCE**Inclined
Sliding Glass



Quick installation at the point of sale



Environmentally friendly refrigerant



Wheels optional

Inclined Sliding Glass
Storage Cabinet

GENERAL CHARACTERISTICS	UDD 100 SCE	UDD 200 SCE	UDD 300 SCE	UDD 400 SCE	UDD 500 SCE	UDD 550 SCE
Daily Energy Consumption (kWh/24h)	1,41	2,10	2,23	2,65	4,30	4,75
Gross Volume (l)	116	183	285	386	473	543
Climate Class	B	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Power (W)	110	125	225	248	304	377
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS						
W x D x H (mm) without packaging	568x568x897/777	724x620x950/829	1014x620x950/829	1304x620x950/829	1554x620x950/829	1754x620x950/829
W x D x H (mm) with packaging	610x610x970	740x750x940	1100x750x940	1400x750x940	1640x750x940	1845x750x940
Weight without Packaging (kg)	41	45	56	65	79	96
Weight with Packaging (kg)	49	57	70	81	96	114
LOADING CAPACITY						
Containers 20'	54	48	32	24	20	18
Containers 40'	114	102	68	50	42	40
Containers 40' HC	264	114	76	60	75	50




Quick installation at the point of sale

Wheels optional




Environmentally friendly refrigerant

Inclined Curved Sliding Glass Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCEB	UDD 200 SCEB	UDD 300 SCEB	UDD 400 SCEB	UDD 500 SCEB	UDD 550 SCEB
Daily Energy Consumption (kWh/24h)	1,41	2,10	2,25	2,95	4,0	4,75
Gross Volume (l)	105	191	295	400	490	562
Climate Class	B	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50	230/50
Power (W)	110	125	225	248	304	377
Refrigerant Gas	HC	HC	HC	HC	HC	HC
DIMENSIONS						
W x D x H (mm) without packaging	568x568x897/777	724x620x950/829	1014x620x950/829	1304x620x950/829	1554x620x950/829	1754x620x950/829
W x D x H (mm) with packaging	600x600x970	800x750x1000	1100x750x1000	1400x750x1000	1640x750x1000	1845x750x1000
Weight without Packaging (kg)	41	45	56	65	79	96
Weight with Packaging (kg)	49	57	70	81	96	114
LOADING CAPACITY						
Containers 20'	54	42	30	24	20	18
Containers 40'	114	88	64	50	42	38
Containers 40' HC	264	162	108	84	72	63


 Flat Sliding Glass


UDD 500 SCN

UDD 300 SCN







Quick installation at the point of sale




Environmentally friendly refrigerant



Wheels optional

Flat Sliding Glass
Storage Cabinet

GENERAL CHARACTERISTICS	UDD 200 SCN	UDD 300 SCN	UDD 400 SCN	UDD 500 SCN
Daily Energy Consumption (kWh/24h)	1,625	1,60	1,96	2,45
Gross Volume (l)	185	286	388	476
Climate Class	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	125	188	203	255
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS				
W x D x H (mm) without packaging	740x650x890	1030x650x890	1320x650x890	1570x650x890
W x D x H (mm) with packaging	800x670x940	1040x670x940	1330x670x940	1580x670x940
Weight without Packaging (kg)	52	62	72	110
Weight with Packaging (kg)	63	76	87	122
LOADING CAPACITY				
Containers 20'	42	32	22	20
Containers 40'	84	68	55	44
Containers 40' HC	126	120	110	75



UDD 500 SCEBN

UDD 200 SCEBN



Quick installation at the point of sale








Wheels optional



Environmentally friendly refrigerant

Inclined Sliding Glass Storage Cabinet



GENERAL CHARACTERISTICS	UDD 100 SCEBN	UDD 200 SCEBN	UDD 300 SCEBN	UDD 400 SCEBN	UDD 500 SCEBN
Daily Energy Consumption (kWh/24h)	1,80	1,95	1,985	2,75	4,0
Gross Volume (l)	164	187	289	392	480
Climate Class	B	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	105	138	221	210	294
Refrigerant Gas	HC	HC	HC	HC	HC
DIMENSIONS					
W x D x H (mm) without packaging	645x650x940/807	740x650x920/793	1030x650x920/793	1320x650x920/793	1570x650x920/793
W x D x H (mm) with packaging	700x700x1000	820x760x950	1100x760x950	1410x760x950	1660x760x950
Weight without Packaging (kg)	47	51	62	72	81
Weight with Packaging (kg)	56	59	76	87	89
LOADING CAPACITY					
Containers 20'	48	42	28	24	20
Containers 40'	102	84	64	50	42
Containers 40' HC	114	95	108	84	75



UDD 305 SCEBN



Quick installation at the point of sale




Environmentally friendly refrigerant



Wheels optional

Inclined Sliding Glass
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 205 SCEBN	UDD 305 SCEBN	UDD 405 SCEBN	UDD 505 SCEBN
Daily Energy Consumption (kWh/24h)	1,975	2,35	3,25	4,85
Gross Volume (l)	213	328	442	541
Climate Class	B	B	B	B
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	138	221	210	294
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS				
W x D x H (mm) without packaging	740x650x1005/877	1030x650x1005/877	1320x650x1005/877	1570x650x1005/877
W x D x H (mm) with packaging	820x760x1035	1100x760x1035	1410x760x1035	1660x760x1035
Weight without Packaging (kg)	52	62	72	110
Weight with Packaging (kg)	63	76	87	122
LOADING CAPACITY				
Containers 20'	42	28	24	42
Containers 40'	84	64	50	84
Containers 40' HC	95	108	84	95



UDD 400 CK

UDD 200 CK



Quick installation at the point of sale








Wheels optional



Environmentally friendly refrigerant

Glass Door
Storage Cabinet



GENERAL CHARACTERISTICS	UDD 200 CK	UDD 300 CK	UDD 400 CK	UDD 500 CK	UDD 600 CK
Daily Energy Consumption (kWh/24h)	1,385	1,911	2,60	4,408	5,482
Gross Volume (l)	206	318	429	526	718
Climate Class	C	C	C	C	C
Operating Temperature Range (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	147	179	212	287	380
Refrigerant Gas	HC	HC	HC	HC	HC
DIMENSIONS					
W x D x H (mm) without packaging	720x715x835	1012x715x835	1302x715x835	1552x715x835	2055x715x835
W x D x H (mm) with packaging	800x850x835	1100x850x940	1400x850x940	1640x850x940	1845x850x940
Weight without Packaging (kg)	51,5	64	75,5	83	104
Weight with Packaging (kg)	56,5	71	91	101	119
LOADING CAPACITY					
Containers 20'	40	28	22	18	16
Containers 40'	86	62	48	40	36
Containers 40' HC	160	106	82	70	61

-35**USD 6935 DTKL BK NF**

Quick installation at the point of sale



Environmentally friendly refrigerant

GENERAL CHARACTERISTICS		DIMENSIONS		LOADING CAPACITY	
Daily Energy Consumption (kWh/24h)	5,11	W x D x H (mm) without packaging	780x762x2150	Containers 20'	14
Gross Volume (l)	640	W x D x H (mm) with packaging	845x785x2275	Containers 40'	30
Climate Class	4	Weight without Packaging (kg)	117	Containers 40' HC	30
Operating Temperature Range Freezer (°C)	-18/-35	Weight with Packaging (kg)	143		
Voltage/Frequency (V/Hz)	230/50				
Power (W)	219				
Refrigerant Gas	HC				



UDD 370 DTK BK

**UDD 45 DTK****UDD 65 DTKL****UDD 370 DTK****UDD 370 DTKL**

LED

Better display with LED lights



Quick installation at the point of sale



Environmentally friendly refrigerant

GENERAL CHARACTERISTICS	UDD 45 DTK	UDD 65 DTKL	UDD 370 DTK	UDD 370 DTKL	UDD 370 DTK BK
Daily Energy Consumption (kWh/24h)	1,60	1,156	8,297	8,315	1,823
Gross Volume (l)	46,5	66	328	328	329
Climate Class	4	4	4	4	4
Operating Temperature Range Freezer (°C)	-18/-23	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50	230/50
Power (W)	135	132	600	600	600
Refrigerant Gas	HC	HC	HC	HC	HC
DIMENSIONS					
W x D x H (mm) without packaging	570x505x487	570x512x690	595x640x1840	595x640x1980	595x640x1840
W x D x H (mm) with packaging	630x570x570	630x585x760	630x670x1920	630x670x2060	630x670x1920
Weight without Packaging (kg)	31,5	38,5	91	96	69,8
Weight with Packaging (kg)	35,5	40	101,5	106	79,5
LOADING CAPACITY					
Containers 20'	144	108	27	27	27
Containers 40'	304	228	57	57	57
Containers 40' HC	336	252	57	57	57



UDD 440 DTKL NF



UDD 440 DTKLE NF

**UDD 440 DTKL****UDD 440 DTKLB**

LED

Better display with LED lights



Quick installation at the point of sale



Environmentally friendly refrigerant

GENERAL CHARACTERISTICS	UDD 440 DTKL	UDD 440 DTKLB	UDD 440 DTKL NF	UDD 440 DTKLE NF
Daily Energy Consumption (kWh/24h)	11,91	11,91	6,94	8,64
Gross Volume (l)	495	526	536	544
Climate Class	4	4	4	4
Operating Temperature Range Freezer (°C)	-18/-23	-18/-23	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50	230/50	230/50
Power (W)	750	750	825/610	700
Refrigerant Gas	HC	HC	HC	HC
DIMENSIONS				
W x D x H (mm) without packaging	680x655x2102	680x655x2122	680x760x2149	680x760x2149
W x D x H (mm) with packaging	760x710x2207	760x710x2207	745x805x2275	745x785x2275
Weight without Packaging (kg)	114	109	157	125
Weight with Packaging (kg)	123	120	170	148
LOADING CAPACITY				
Containers 20'	24	24	21	21
Containers 40'	51	51	42	47
Containers 40' HC	57	57	54	47

**UDD 690 DTKLE BK NF****UDD 690 DTKLE NF**

LED

Better display with LED lights



Quick installation at the point of sale




Environmentally friendly refrigerant.

GENERAL CHARACTERISTICS	UDD 690 DTKLE NF	UDD 690 DTKLE BK NF
Daily Energy Consumption (kWh/24h)	13,6	3,73
Gross Volume (l)	640	640
Climate Class	4	4
Operating Temperature Range Freezer (°C)	-18/-23	-18/-23
Voltage/Frequency (V/Hz)	230/50	230/50
Power (W)	725	173
Refrigerant Gas	HC	HC
DIMENSIONS		
W x D x H (mm) without packaging	780x761x2149	780x762x2150
W x D x H (mm) with packaging	845x785x2275	845x785x2275
Weight without Packaging (kg)	142	117
Weight with Packaging (kg)	168	143
LOADING CAPACITY		
Containers 20'	14	14
Containers 40'	30	30
Containers 40' HC	30	30

LED Better display with LED lights

 Quick installation at the point of sale

 Environmental lyfriendly refrigerant

GENERAL CHARACTERISTICS	UDD 1600 D3KL NF
Daily Energy Consumption (kWh/24h)	16,58
Gross Volume (l)	1280
Climate Class	4
Operating Temperature Range Freezer (°C)	-18/-23
Voltage/Frequency (V/Hz)	230/50
Power (W)	2000
Refrigerant Gas	HC
DIMENSIONS	
W x D x H (mm) without packaging	1600x762x2073
W x D x H (mm) with packaging	1675x770x2150
Weight without Packaging (kg)	309
Weight with Packaging (kg)	333
LOADING CAPACITY	
Containers 20'	7
Containers 40'	15
Containers 40' HC	15



UDD 1600 D3KL NF