




GEA Engineering
for a better
world.

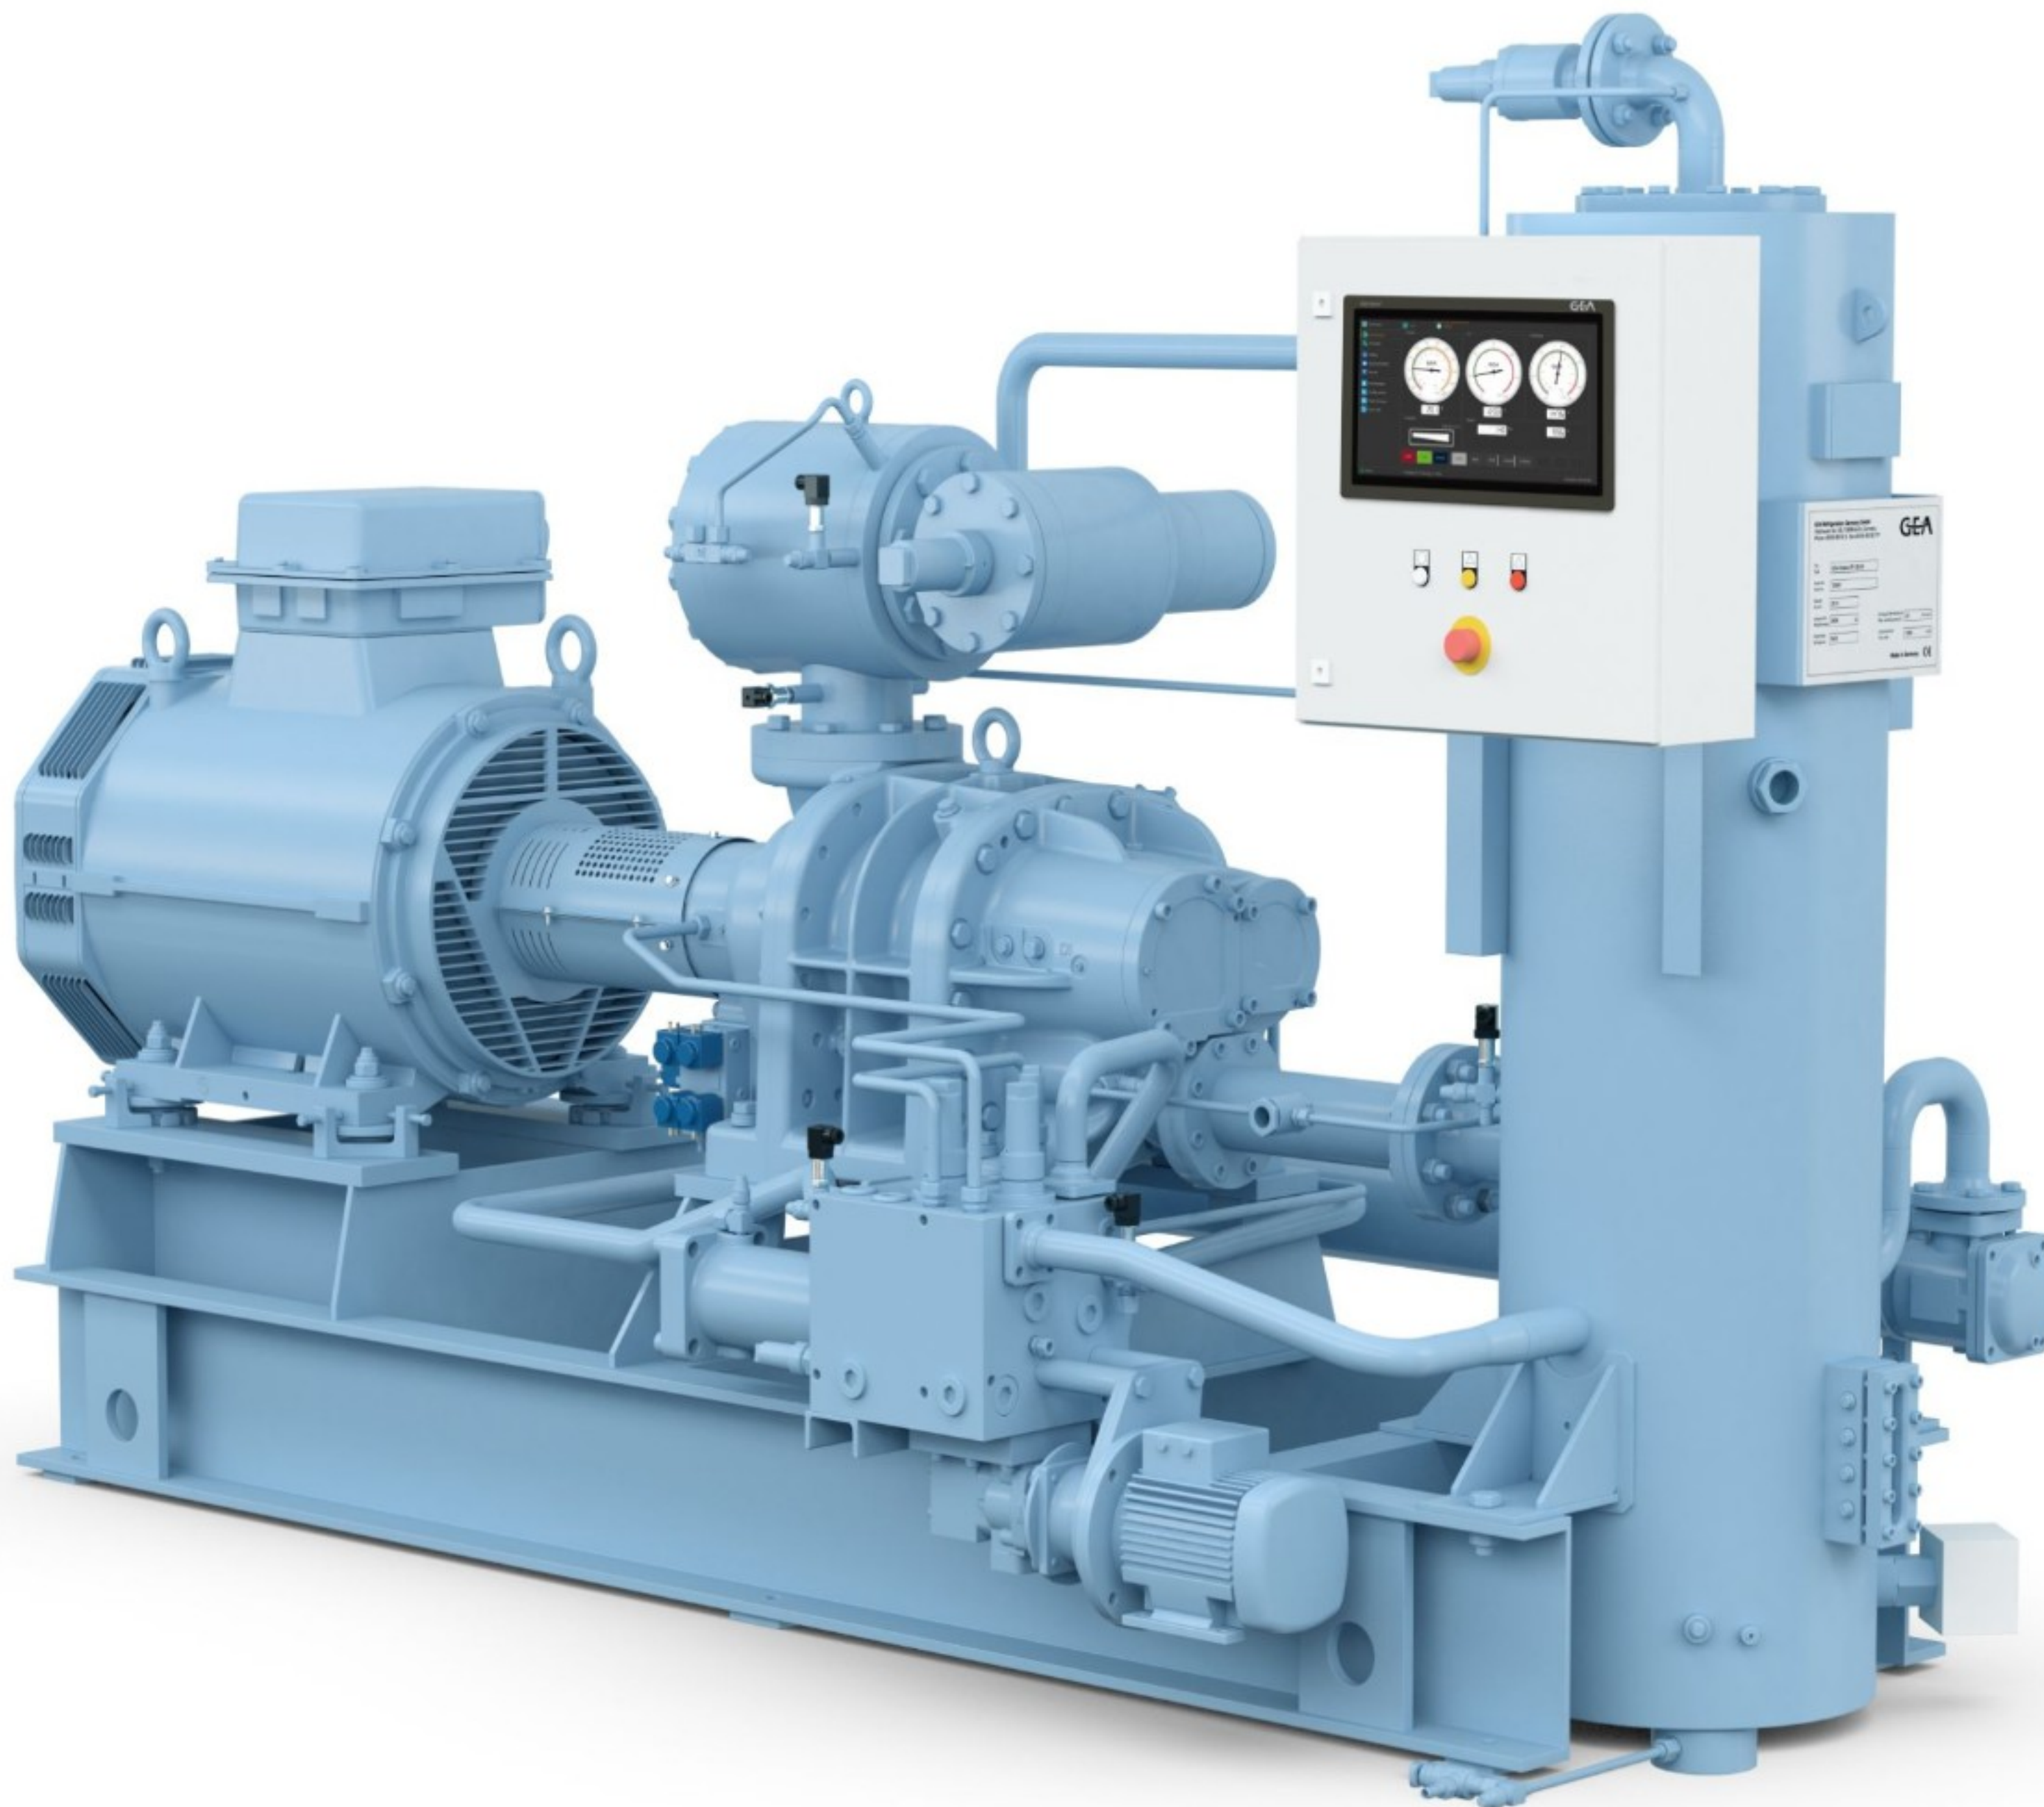

NSSPL SCREW COMPRESSOR PACKAGE

WITH

GEA GRASSO COMPRESSORS

info@nsspl.in | www.nsspl.in | marketing@nsspl.in
+91 99099 58891

Characterized by intelligent design and premium components for maximum quality, efficiency and reliability.



GEA Grasso SP1



GEA Grasso M

KEY CHARACTERISTICS

BROAD PORTFOLIO : Choose your solution to fit your needs, for high- or low temperature applications, with single-stage, two-stage or dual-stage packages.

SUSTAINABLE AND FUTURE-PROOF EQUIPMENT : Our experience and focus on natural refrigerants help you to build a cost-effective and sustainable facility for years of excellent operation.

ENERGY EFFICIENCY : State-of-the-art components ensure industry-leading efficiency and drastically reduce energy costs.

RELIABILITY AND LONGEVITY : A sophisticated safety concept, project-specific configurations of bearings and oil supply and minimized weld seams make GEA packages safe, reliable and durable.

ECONOMICAL SERVICE : Reduce your total cost of ownership with low-maintenance and easy-to-service machines



Applications:-

- Food and Beverages
- Sea Food and Marine
- Chemical and Pharmaceutical
- Any refrigeration requirements

TECHNICAL DATA SHEET

NSSPL Screw Package with Gea grasso M	Motor speed (rpm)	Cooling capacity (KW)		Dimensions* (mm)			Weight* (kg)
		R717 -10 / +35 °C	R717 -40 / -10 °C	L	W	H	without motor
NSSPL Package with GEA Grasso M-C	3,600	172	54	2200	1225	1950	1350
	4,500	219	68				
NSSPL Package with GEA Grasso M-D	3600	206	64	2200	1225	1950	1450
	4500	262	81				
NSSPL Package with GEA Grasso M-E	3600	247	76	2200	1225	1975	1550
	4500	313	96				
NSSPL Package with GEA Grasso M-G	3600	293	88	2300	1225	1975	1650
	4500	372	111				
NSSPL Package with GEA Grasso M-H	3600	374	116	2550	1225	1950	1725
	4500	471	147				
NSSPL Package with GEA Grasso M-L	3600	432	134	2550	1225	1950	1800
	4500	544	169				
NSSPL Package with GEA Grasso M-M	3600	568	176	2600	1225	2025	1875
	4500	715	222				
NSSPL Package with GEA Grasso M-N	3600	698	220	2600	1225	2075	1925
	4500	879	274				

* Dimensions and weights are based on standard exemplary applications. Values can differ depending on the specific operating conditions.

Gea grasso SP1	Motor speed (rpm)	Cooling capacity (KW)		Dimensions* (mm)			Weight* (kg)
		R717 -10 / +35 °C	R717 -40 / -10 °C	L	W	H	without motor
NSSPL Package with GEA Grasso SP1-P	3,600	646	197	3200	1400	2050	2500
NSSPL Package with GEA Grasso SP1-R	3600	835	255	3500	1400	2050	2750
	4500	1064	318				
NSSPL Package with GEA Grasso SP1-S	3600	1056	322	3500	1400	2050	2750
	4500	1320	403				
NSSPL Package with GEA Grasso SP1-T	3600	1183	361	3550	1450	2100	2900
	4500	1479	451				
NSSPL Package with GEA Grasso SP1-V	3600	1388	428	4050	1800	2100	3400
NSSPL Package with GEA Grasso SP1-W	3600	1619	499	4050	1800	2100	3400
NSSPL Package with GEA Grasso SP1-Y	3600	1964	606	4100	1800	2150	3500
NSSPL Package with GEA Grasso SP1-Z	3600	2282	703	4450	1800	2190	4000
NSSPL Package with GEA Grasso SP1-XA	3600	2699	832	4450	1800	2190	4100
NSSPL Package with GEA Grasso SP1-XB	3600	3415	1028	5550	1820	2775	7500
NSSPL Package with GEA Grasso SP1-XC	3600	4029	1242	5650	1820	2975	7900
NSSPL Package with GEA Grasso SP1-XD	3600	4768	1470	6050	1820	2975	8900
NSSPL Package with GEA Grasso SP1-XE	3600	5891	1816	7700	1820	3150	10400
NSSPL Package with GEA Grasso SP1-XF	3600	7034	2168	7700	1820	3150	11400
NSSPL Package with GEA Grasso SP1-XG	3600	8058	2502	8100	1820	3250	12750
NSSPL Package with GEA Grasso SP1-XH	3600	9423	2926	9100	2020	3450	14750

1) The variant GEA Grasso SP1 horizontal provides identical performance data but slightly reduced length and width.

* Dimensions and weights are based on standard exemplary applications. Values can differ depending on the specific operating conditions.



Natural Storage Solutions Pvt. Ltd.

Your Reliable Partner For Post Harvest Projects

: Mfg. Unit :

Block No.: 225/P, Chhatral - Kadi Road, Nr. Somany Ceramics Godown,
At - Dhanot - 382729, Tal. Kalol, Dist. Gandhinagar, Gujarat - India.

**Contact : +91 2764 233803 / 805,
+91 99099 60282 / 83, +91 99099 56803**