


em1000B

serial


PACKAGE BALING (BUNDLING) MACHINE

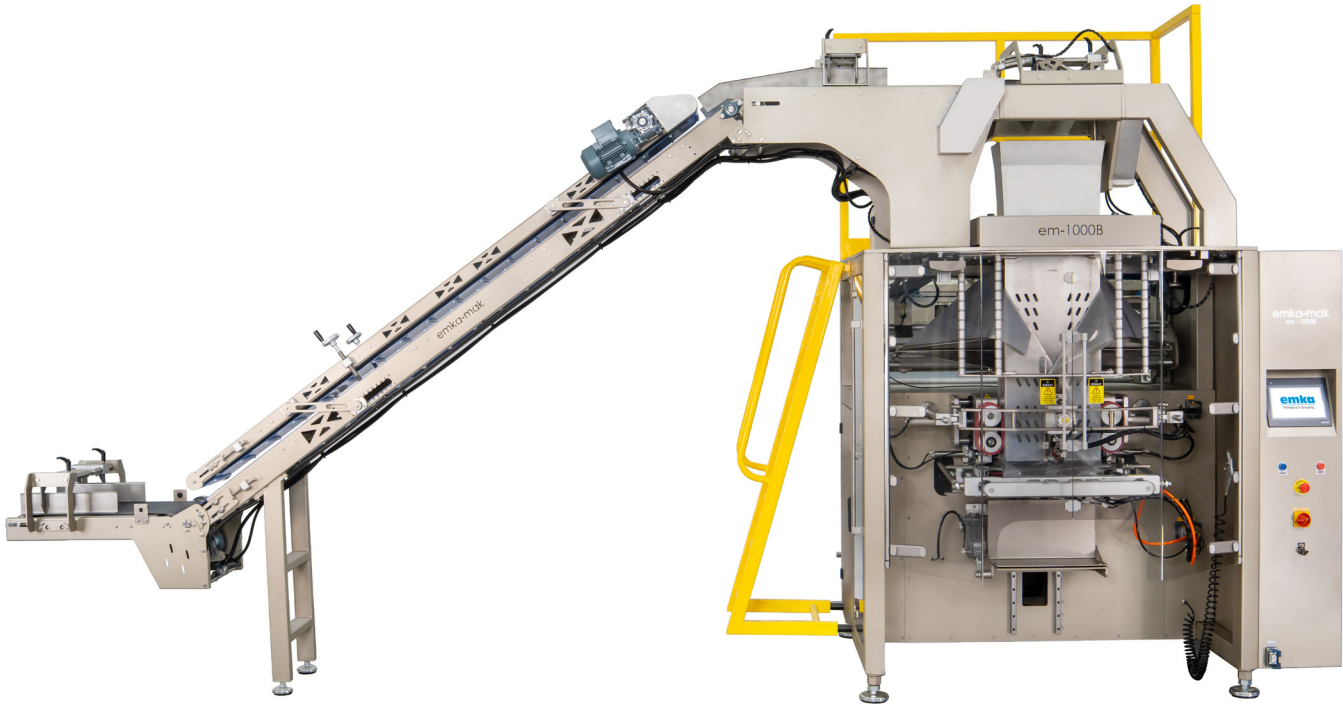

ADVANTAGES

- ▶ Servo-driven horizontal sealing jaw
- ▶ Easy to control machine operation functions and parameters with color touch screen
- ▶ Servo controlled single or double row package baling system
- ▶ Photocell package baling feature
- ▶ Thermal transfer bonding compatible with standards
- ▶ Air-free packages with lower and upper transport conveyors
- ▶ High-quality bale package with intensive cooling system.
- ▶ Ability to control the packaging machine using the Bundling (Package baling) machine
- ▶ Servo-controlled package holder system

	MAX. WORKING CAPACITY ~ 50 Pouch / Min.
	MAX. WORKING CAPACITY ~ 100 Pouch / Min.
	MAX. WORKING CAPACITY ~ 100 Pouch / Min.

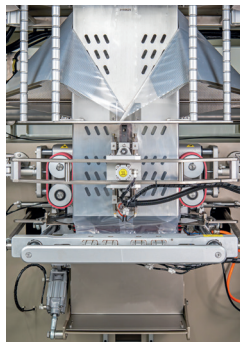

WEIGHT ~ 1350 kg	AIR PRESSURE ~ 6 Bar (min.)	TOTAL POWER ~ 11.3kW
FOIL'S WIDTH ~ 800 - 1300 mm	LENGTH OF BALE PACK. 790 mm	POWER SUPPLY 380-400 VAC 3P+N+PE 50/60hz

FEATURES

- ▶ Programmable Logic Controller System
- ▶ Drive-motors
- ▶ High precision planetary gear drive systems
- ▶ Servo-motors
- ▶ 10.1" Color Touch Screen
- ▶ Stainless steel out-put conveyor system
- ▶ Foil System (with Motor)
- ▶ Integrated Air Blow Gun
- ▶ Safety switches and protective covers
- ▶ Statistics Page with Custom Encryption
- ▶ Settings Page with Custom Encryption
- ▶ "Out of Foil" warning system

OPTIONAL FEATURES

- ▶ Automatic film target tracing (Edge control tracking)
- ▶ Hot and cold sealing functionality
- ▶ Bellows System
- ▶ Remote access module
- ▶ Horizontal and vertical package alignment thanks to the package rotation system

PACKAGE
TYPES TO
BALE

