

em250Q

serial



QUATRO PACKAGING MACHINE

FEATURES


- ▶ Programmable Logic Controller System
- ▶ Servo-motors
- ▶ Drive-motors
- ▶ High precision planetary gear drive systems
- ▶ Stainless steel out-put conveyor system
- ▶ Foil coil system with Pneumatic shaft
- ▶ "Out of Foil" warning system
- ▶ "Low Product Level" warning and automatic stop system
- ▶ Integrated Air Blow Gun
- ▶ Safety switches and protective covers
- ▶ Statistics Page with Custom Encryption
- ▶ Settings Page with Custom Encryption
- ▶ 10.1" Color Touch Screen
- ▶ Foil attaching and bonding unit

OPTIONAL FEATURES

- ▶ Automatic film target tracing (Edge control tracking)
- ▶ Foil tapping system
- ▶ Bellows System
- ▶ Remote access module
- ▶ Euro-Hole

ADVANTAGES

- ▶ Perfect fit with all packaging types with hot or shock sealing options
- ▶ Separate temperature control for horizontal sealing (front-back) and vertical sealing.
- ▶ Servo-driven horizontal sealing jaw
- ▶ Compatible with Volumetric, Auger (Screw), Linear Weigher & Multi-Head Weigher System
- ▶ Easy to control machine operation functions and parameters with color touch screen
- ▶ Maximum package quality with servo-controlled pallet group and improved foil group

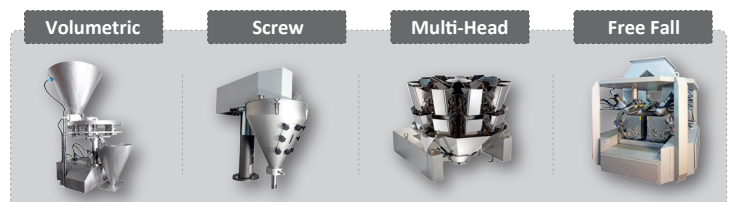

Dimensions	em250Q	VOLIMETRIC	SCREW
Height	1720 mm ~	3090 mm ~	2650 mm ~
Width	1250 mm ~	1250 mm ~	1250 mm ~
Depth	1800 mm ~	1800 mm ~	1800 mm ~
	LINEAR	MULTI-HEAD	FREE FALL
Height	3450 mm ~	3450 mm ~	3350 mm ~
Width	3070 mm ~	3070 mm ~	3070 mm ~
Depth	2700 mm ~	2700 mm ~	2700 mm ~
	Foil's width 140 - 580 Length of package 40 - 400 Package Width 65 - 260	Foil's width 200 - 450 Length of package 40 - 350	
MAX SPEED 90 Pouch/min.	(It depends on the physical structure of the packaging material and the product to be packed)		FOIL DIAMETER 400 mm
AIR PRESSURE 6 Bar (min.)	POWER SUPPLY 380-400 VAC 3P+N+PE 50/60hz	TOTAL POWER 9,2 kW	WEIGHT 950 kg

PACKAGE
SHAPES

