

ASEM[®] LABORATORY FURNITURE
CATAS CEN
13150

ETA_SERIES



ASEM[®] Laboratory Furniture
CEEN
13150

ETA_SERIES



THE IMPORTANCE OF THE DETAILS

The use of top quality materials is the basic foundation on which to build the philosophy that characterizes the design of our furniture: resistance, functionality, ease of use.

All our benches and accessories are modular elements designed to meet the ever-changing demand of modern laboratories, compliant and certified to EN 13150 by Bureau Veritas and tested by CATAS® as well as their ISO 9001: 2015 design and production system.

ASEM® furnishings can be equipped with a wide range of users, to meet even the most particular needs of our customers, so as to be able to ensure maximum comfort during their work.

ASEM® also offers an interesting color palette to be able to customize furnishing accessories, such as EN 16121 SEVERA certified cabinets and wardrobes, in such a way as to make it easier to find orientation within the laboratory, to recall the company colors, or only to satisfy the taste of customers.

Our goal is to design and design the most advanced and safe work environment, to ensure a high level of performance during your everyday operations.



INDEX

ETA_SERIES

Introduction	3
How to design laboratories	6
ETA_SERIES	8
Wall bench ETA_P	10
Central bench ETA_C	11
ETA_SERIES	14
“C” Frame system bench	16
Single bench	18
bench	20
Infill panels and setting	22
Supply and drain settings	23
Reagent shelves	24
Worktops	26
Washing units	36
Basement for washing units	38
Fittings for washing unit	39
Accessories (vertical panel)	40

Services / fittings	42
Electrical services	44
Gas and water taps	46
Under bench cabinets	51
Reinforced laboratory table	54
Anti/vibration tables	55
Tall cabinets	58
Low cabinets	59
Tops	60
Suspended cabinets	61
Steel cabinets	62
Technical seating	65
Safety	66

How to design YOUR LABORATORY

To design your laboratory you will simply have to



- 1 Measure the sizes of room.
- 2 Indicate on the plan the position of the windows, doors and the supply and drain setting.
- 3 Specify the presence and the dimension of any baseboards and columns.
- 4 Chose the worktop according to the type of working.
- 5 Indicate the small cabinets under the bench.
- 6 Complete with fittings: taps, sockets and infill panels.

**OUR COMPLETELY MODULAR BENCHES ARE DESIGNED
TO ADAPT TO THE SPECIFIC REQUIREMENTS OF EACH
BENCH.**



ETA_SERIES



MAIN COMPONENTS

- STEEL FRAME WITH "C" SHAPED "LEGS" IN TUBE 60x30 mm
- SERVICE COVERING PANELS
- WORKTOPS
- REAGENT SHELVES



THE ETA SERIES PROVIDES
THE SERVICES ON ONE
PRE-DRILLED BAR AT THE
LEVEL OF THE WORKTOP
OR ON A VERTICAL RISE.

Our benches are available in single base modules of 600, 900, 1200, 1500 and 1800 mm or in configurations with central leg in common that facilitates alignment.

The bases are coated with anti-acid epoxy resins in pure white RAL 9010.


Standard depths are 660 or 810 mm for wall benches and 1260 and 1560 mm for those Central.



ETA_SERIES

ETA_P / SERIES

- 1 Glasses suspended cabinet
- 2 Reagent shelves
- 3 EE Sockets & Switch
- 4 H₂O Tap
- 5 Gas -Nitrogen / Vacuum ... Tap
- 6 Worktop
- 7 Side infill panel
- 8 Services covering panel
- 9 ETA basement
- 10 Under benches cabinets
- 11 Columns for reagent shelves

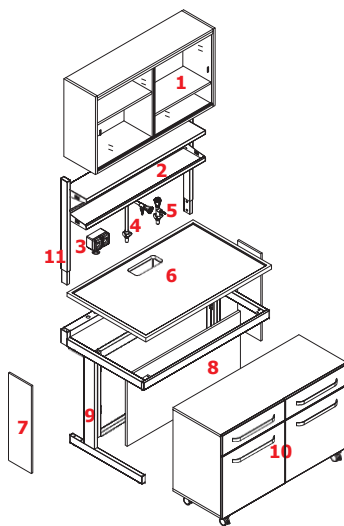


WALL BENCH



ETA_C SERIES

- 1 Reagent shelf
- 2 Water mixer tap
- 3 EE Turret for sockets
- 4 H₂O Water tap
- 5 Gas -Nitrogen / Vacuum ... Tap
- 6 Worktop
- 7 Side infill panel
- 8 Services covering panel
- 9 ETA basement
- 10 Under bench cabinet
- 11 Acrylic glass splash panel
- 12 Columns for reagent shelf.

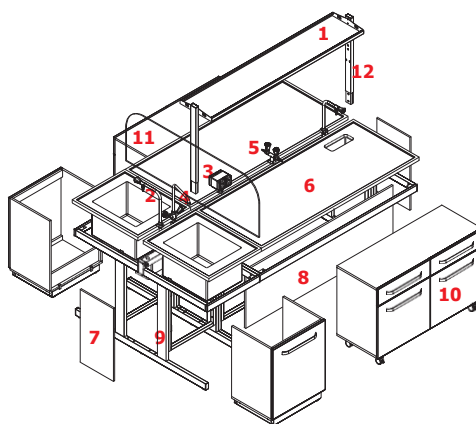

CENTRAL ISLAND BENCH





USER FRIENDLY

The service lift ASEM somebody. (optional on request) is ideal for the distribution of water, electricity and technical gases.

Enhancing the ease of use and accessibility to the elements is the basis for achieving results by optimizing space and time.

MODULARITY AND SAFETY.

THE VERTICAL SERVICE
PANEL allows to have
the services on the wall.
NOT JUST
CONVENIENCE, BUT
SAFETY FOR THE USERS.

ZS

ETA_SERIES

ETA_PLAIN

MODULARITY

N E W

"C" BASE CONFIGURATION

The absence of frame legs in front position ensures the operator the maximum freedom of movement.

The wall frame base with standard depth is moved back to allow approaching it to the wall when there is a baseboard and positioning it on the wall after the supply and drain setting; the side infill panel can be easily removed and it can be shaped on request.

The protection treatment of the metal surfaces is based on pickling and phosphatizing processes and the electrostatic application of enamel based on epoxy resin powders (thickness of 100 ± 10 micron) light grey colour RAL7035 (other colours on request), drying in heating tunnel at 180 °C.

The levelling feet are made of steel coated with anti-acid plastic material.

The bases of the elements having a standard modularity of 60, 90, 120, 150, 180* cm, have 2 heights : **770 or 900**.




Special elements with intermediate measures can be made on request.







IDEAL FOR THE COMPOSITION OF TABLES OR OFFICE AND LABORATORY DESKS, IT FINDS SPACE IN ANY ROOM THANKS TO ITS WIDE RANGE OF SIZES.

SINGLE BASEMENT **ETA**_PLAIN



WETP00060SF Table frame ETP 600 L x 750 P x 900 A mm	WETP00090SF Table frame ETP 900 L x 750 P x 900 A mm	WETP00120SF Table frame ETP 1200 L x 750 P x 900 A mm	WETP00150SF Table frame ETP 1500 L x 750 P x 900 A mm	WETP00180SF Table frame ETP 1800 L x 750 P x 900 A mm
WETP00066SF Table frame ETP 600 L x 600 P x 900 A mm	WETP00096SF Table frame ETP 900 L x 600 P x 900 A mm	WETP00126SF Table frame ETP 1200 L x 600 P x 900 A mm	WETP00156SF Table frame ETP 1500 L x 600 P x 900 A mm	WETP00186SF Table frame ETP 1800 L x 600 P x 900 A mm
WETP00067SF Table frame ETP 600 L x 750 P x 770 A mm	WETP00097SF Table frame ETP 900 L x 750 P x 770 A mm	WETP00127SF Table frame ETP 1200 L x 750 P x 770 A mm	WETP00157SF Table frame ETP 1500 L x 750 P x 770 A mm	WETP00187SF Table frame ETP 1800 L x 750 P x 770 A mm
WETP00069SF Table frame ETP 600 L x 600 P x 770 A mm	WETP00099SF Table frame ETP 900 L x 600 P x 770 A mm	WETP00129SF Table frame ETP 1200 L x 600 P x 770 A mm	WETP00159SF Table frame ETP 1500 L x 600 P x 770 A mm	WETP00189SF Table frame ETP 1800 L x 600 P x 770 A mm

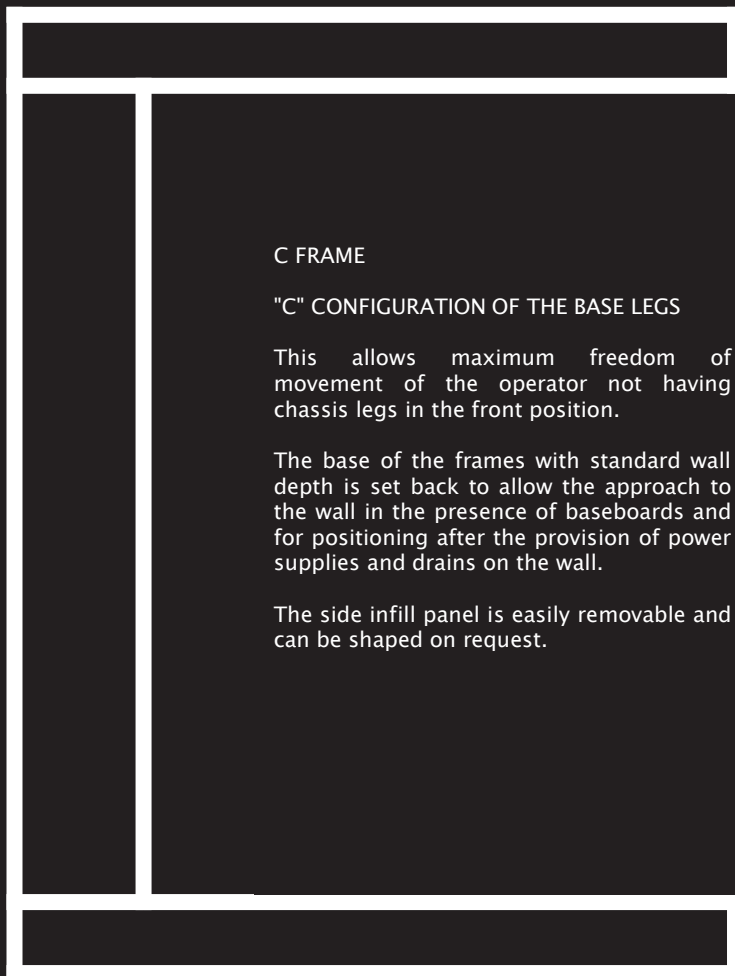

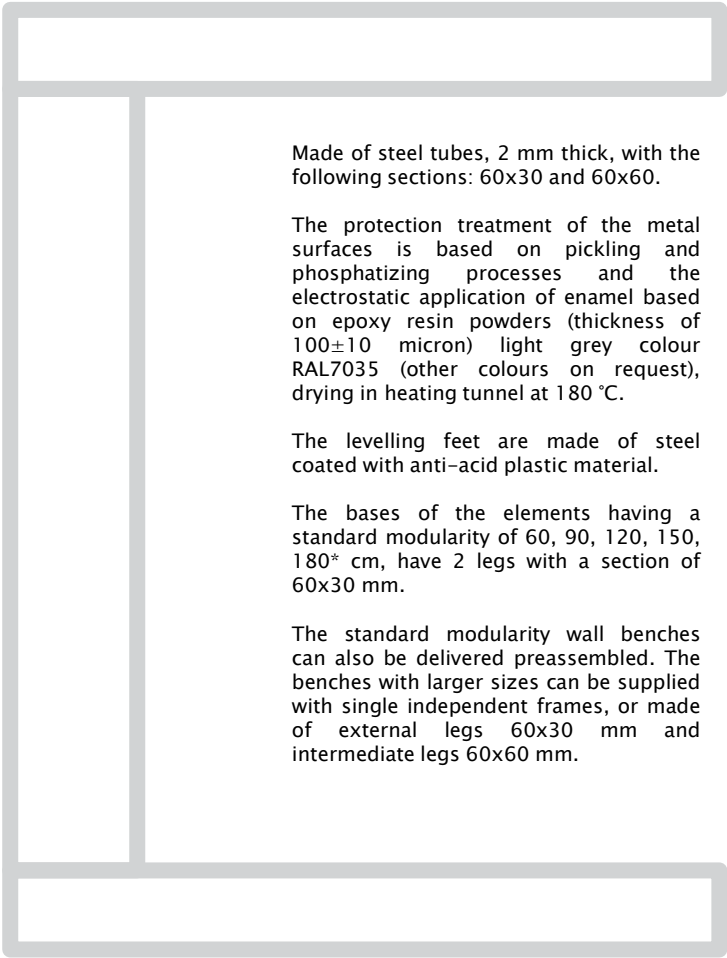

Made of steel tubes, 2 mm thick, with the following sections: 60x30 and 60x60.

The protection treatment of the metal surfaces is based on pickling and phosphatizing processes and the electrostatic application of enamel based on epoxy resin powders (thickness of 100 ± 10 micron) light grey colour RAL7035 (other colours on request), drying in heating tunnel at 180 °C.

The levelling feet are made of steel coated with anti-acid plastic material.

The bases of the elements having a standard modularity of 60, 90, 120, 150, 180* cm, have 2 legs with a section of 60x30 mm.

The standard modularity wall benches can also be delivered preassembled. The benches with larger sizes can be supplied with single independent frames, or made of external legs 60x30 mm and intermediate legs 60x60 mm.

SINGLE BASEMENT

The metal bases are made of steel tubular sections of 60x30, 30x30 mm, and made of modules that are independent of each other, can be assembled and mechanically connectable; the tight working tolerances allow the interchangeability or the substitution of the single elements that compose them.

EXCEPTIONAL STRENGTH THAT ALLOWS TO GUARANTEE LOAD GREATER THAN 200 KG/M2 EVENLY DISTRIBUTED

ETA_SERIES

SERVICES AT WORKTOP LEVEL

Service stand with 28 mm diameter holes and removable plastic caps.

The protection treatment of the metal surfaces is based on pickling and phosphatizing processes and the electrostatic application of enamel based on epoxy resin powders (thickness of 100±10 micron) light grey colour RAL7035 (other colours on request), drying in heating tunnel at 180 °C

Sigle wall bench basement



WETP00060 WALL BENCH BASEMENT ETA_P 600 L x 810 P x 900 A mm	WETP00090 WALL BENCH BASEMENT ETA_P 900 L x 810 P x 900 A mm	WETP00120 WALL BENCH BASEMENT ETA_P 1200 L x 810 P x 900 A mm	WETP00150 WALL BENCH BASEMENT ETA_P 1500 L x 810 P x 900 A mm	WETP00180 WALL BENCH BASEMENT ETA_P 1800 L x 810 P x 900 A mm
WETP00066 WALL BENCH BASEMENT ETA_P (prof. ridotta) 600 L x 660 P x 900 A mm	WETP00096 WALL BENCH BASEMENT ETA_P (prof. ridotta) 900 L x 660 P x 900 A mm	WETP00126 WALL BENCH BASEMENT ETA_P (prof. ridotta) 1200 L x 660 P x 900 A mm	WETP00156 WALL BENCH BASEMENT ETA_P (prof. ridotta) 1500 L x 660 P x 900 A mm	WETP00186 WALL BENCH BASEMENT ETA_P (prof. ridotta) 1800 L x 660 P x 900 A mm
WETP00067 WALL BENCH BASEMENT ETA_P 600 L x 810 P x 770 A mm	WETP00097 WALL BENCH BASEMENT ETA_P 900 L x 810 P x 770 A mm	WETP00127 WALL BENCH BASEMENT ETA_P 1200 L x 810 P x 770 A mm	WETP00157 WALL BENCH BASEMENT ETA_P 1500 L x 810 P x 770 A mm	WETP00187 WALL BENCH BASEMENT ETA_P 1800 L x 810 P x 770 A mm






WETP08080 Corner bench basement 810 x 810 mm

WETP06060 corner bench basement 660 x 600 mm

SM90001TV front reinforced frame for "C" frame leg 900 mm A

SINGLE AND MULTIPLE BASEMENT FOR YOUR LABORATORY

SINGLE BASAMENT FOR CENTRAL BENCH



WETC00090 CENTRAL BASEMENT ETA_C 600 L x 1560 P x 900 A mm	WETC00096 CENTRAL BASEMENT ETA_C 900 L x 1560 P x 900 A mm	WETC00126 CENTRAL BASEMENT ETA_C 1200 L x 1560 P x 900 A mm	WETC00156 CENTRAL BASEMENT ETA_C 1500 L x 1560 P x 900 A mm	WETC00186 CENTRAL BASEMENT ETA_C 1800 L x 1560 P x 900 A mm
WETC00066 CENTRAL BASEMENT ETA_C (less depth) 600 L x 1260 P x 900 H mm	WETC00096 CENTRAL BASEMENT ETA_C (less depth) 900 L x 1260 P x 900 H mm	WETC00126 CENTRAL BASEMENT ETA_C (less depth) 1200 L x 1260 P x 900 H mm	WETC00156 CENTRAL BASEMENT ETA_C (less depth) 1500 L x 1260 P x 900 H mm	WETC00186 CENTRAL BASEMENT ETA_C (less depth) 1800 L x 1260 P x 900 H mm

MULTIPLE BASEMENT

Basement consisting of "C" frames with standard dimensions with common intermediate leg, 60x60 mm section.

ETA_SERIES

SERVICES AT WORKTOP LEVEL

MULTIPLE BASEMENT

WETP00210 multiple basement ETA_P 2100 L x 810 P x 900 A mm	WETP00240 multiple basement ETA_P 2400 L x 810 P x 900 A mm	WETP00270 multiple basement ETA_P 2700 L x 810 P x 900 A mm	WETP00300 multiple basement ETA_P 1800+1200Lx810Px900Amm	WETP00301 multiple basement ETA_P 2x1500 L x 810 P x 900 A mm
WETP00216 multiple basement ETA_P (low depth) 2100 L x 660 P x 900 A mm	WETP00246 multiple basement ETA_P (low depth) 2400 L x 660 P x 900 A mm	WETP00276 multiple basement ETA_P (low depth) 2700 L x 660 P x 900 A mm	WETP00306 multiple basement ETA_P (low depth) 1800+1200Lx660Px900Amm	WETP00307 multiple basement ETA_P (low depth) 2x1500 L x 660 P x 900 A mm
WETC00210 multiple basement ETA_C 2100 L x 1560 P x 900 A mm	WETC00240 multiple basement ETA_C 2400 L x 1560 P x 900 A mm	WETC00270 multiple basement ETA_C 2700 L x 1560 P x 900 A mm	WETC00300 multiple basement ETA_C 1800+1200Lx1560Px900Amm	WETC00301 multiple basement ETA_C 2x1500 L x 1560 P x 900 A mm
WETC00216 multiple basement ETA_C (low depth) 2100 L x 1260 P x 900 A mm	WETC00246 multiple basement ETA_C (low depth) 2400 L x 1260 P x 900 A mm	WETC00276 multiple basement ETA_C (low depth) 2700 L x 1260 P x 900 A mm	WETC00306 multiple basement ETA_C (low depth) 1800+1200Lx1260Px900Amm	WETC00307 multiple basement ETA_C (low depth) 2x1500 L x 1260 P x 900 A mm

MULTIPLE BASEMENT

WETP00330 multiple basement ETA_P 3300 L x 810 P x 900 A mm	WETP00360 multiple basement ETA_P 3600 L x 810 P x 900 A mm	WETP00361 multiple basement ETA_P 3x1200 L x 810 P x 900 A mm	WETP00390 multiple basement ETA_P 3900 L x 810 P x 900 A mm	WETP00420 multiple basement ETA_P 4200 L x 810 P x 900 A mm
WETP00336 multiple basement ETA_P (low depth) 3300 L x 660 P x 900 A mm	WETP00366 multiple basement ETA_P (low depth) 3600 L x 660 P x 900 A mm	-	WETP00396 multiple basement ETA_P (low depth) 3900 L x 660 P x 900 A mm	WETP00426 multiple basement ETA_P (low depth) 4200 L x 660 P x 900 A mm
WETC00330 multiple basement ETA_C 3300 L x 1560 P x 900 A mm	WETC00360 multiple basement ETA_C 3600 L x 1560 P x 900 A mm	-	WETC00390 multiple basement ETA_C 3900 L x 1560 P x 900 A mm	WETC00420 multiple basement ETA_C 4200 L x 1560 P x 900 A mm
WETC00336 multiple basement ETA_C (low depth) 3300 L x 1260 P x 900 A mm	WETC00366 multiple basement ETA_C (low depth) 3600 L x 1260 P x 900 A mm	-	WETC00396 multiple basement ETA_C (low depth) 3900 L x 1260 P x 900 A mm	WETC00426 multiple basement ETA_C (low depth) 4200 L x 1260 P x 900 A mm

MULTIPLE BASEMENT

The shipment can be made, as for all central
counters only of disassembled elements

ETA_SERIES

**PERFECT ALIGNMENT OF THE
STRUCTURE, WORKTOP AND
REAGENT SHELVES**

MULTIPLE BASEMENT

WETP00450 MULTIPLE BASEMENT ETA_P 4500 L x 810 P x 900 A mm	WETP00480 MULTIPLE BASEMENT ETA_P 4800 L x 810 P x 900 A mm	WETP00510 MULTIPLE BASEMENT ETA_P 5100 L x 810 P x 900 A mm	WETP00540 MULTIPLE BASEMENT ETA_P 5400 L x 810 P x 900 A mm
WETP00456 MULTIPLE BASEMENT ETA_P 4500 L x 660 P x 900 A mm	WETP00486 MULTIPLE BASEMENT ETA_P 4800 L x 660 P x 900 A mm	WETP00516 MULTIPLE BASEMENT ETA_P 5100 L x 660 P x 900 A mm	WETP00546 MULTIPLE BASEMENT ETA_P 5400 L x 660 P x 900 A mm
WETC00450 MULTIPLE BASEMENT ETA_C 4500 L x 1560 P x 900 A mm	WETC00480 MULTIPLE BASEMENT ETA_C 4800 L x 1560 P x 900 A mm	WETC00510 MULTIPLE BASEMENT ETA_C 5100 L x 1560 P x 900 A mm	WETC00540 ccomposizione basamento ETA_C 5400 L x 1560 P x 900 A mm
WETC00456 MULTIPLE BASEMENT ETA_C 4500 L x 1260 P x 900 A mm	WETC00486 MULTIPLE BASEMENT ETA_C 4800 L x 1260 P x 900 A mm	WETC00516 MULTIPLE BASEMENT ETA_C 5100 L x 1260 P x 900 A mm	WETC00546 ccomposizione basamento ETA_C 5400 L x 1260 P x 900 A mm

MULTIPLE BASEMENT

WETP00570 MULTIPLE BASEMENT ETA_P 5700 L x 810 P x 900 A mm	WETP00600 MULTIPLE BASEMENT ETA_P 6000 L x 810 P x 900 A mm
WETP00576 MULTIPLE BASEMENT ETA_P 5700 L x 660 P x 900 A mm	WETP00606 MULTIPLE BASEMENT ETA_P 6000 L x 660 P x 900 A mm
WETC00570 MULTIPLE BASEMENT ETA_C 5700 L x 1560 P x 900 A mm	WETC00600 MULTIPLE BASEMENT ETA_C 6000 L x 1560 P x 900 A mm
WETC00576 MULTIPLE BASEMENT ETA_C 5700 L x 1260 P x 900 A mm	WETC00606 MULTIPLE BASEMENT ETA_C 6000 L x 1260 P x 900 A mm

SERVICE COVERING PANEL

ETA_SERIES

INFILL SIDE PANELS

Plastic or metal laminate panel positioned at the ends of the benches

WSL9000 SIDE PANEL ETA_P WHITE 810Px900Amm	WSL9010 SIDE PANEL ETA_C WHITE 1560Px900Amm	WSL9050 SIDE PANEL ETA_C WHITE 1260Px900Amm	WSL9004M SIDE STEEL PANEL ETA_P WHITE 750Px900Amm	WSL9000M SIDE STEEL PANEL ETA_P WHITE 810Px900Amm	WSL90066 SIDE STEEL PANEL ETA_P WHITE 660Px900Amm	WSL9050 SIDE STEEL PANEL ETA_C WHITE 1260Px900Amm	WSL9010M SIDE STEEL PANEL ETA_C WHITE 1560Px900Amm
WSL9005M SIDE STEEL PANEL ETA_P WHITE 750P x 770A mm	WSL9001M SIDE STEEL PANEL ETA_P WHITE 750P x 770A mm						

BACK PANELS

Plastic laminate panel, fixed, in the rear position to mask the user connections when a wall-mounted counter is used as a central counter or placed next to glass walls

WTP00060 WHITE BACK PANEL L 600 x 900 A mm	WTP00090 WHITE BACK PANEL L 900 x 900 A mm	WTP00120 WHITE BACK PANEL L 1200 x 900 A mm	WTP00150 WHITE BACK PANEL L 1500 x 900 A mm	WTP00180 WHITE BACK PANEL L 1800 x 900 A mm
WTP00061 WHITE BACK PANEL L 600 x 770 A mm	WTP00091 WHITE BACK PANEL L 900 x 770 A mm	WTP00121 WHITE BACK PANEL L 1200 x 770 A mm	WTP00151 WHITE BACK PANEL L 1500 x 770 A mm	WTP00181 WHITE BACK PANEL L 1800 x 770 A mm

BACK PANEL FOR BENCHES FOR BENCH WITH VERTICAL FRAME

WTP00260 BACK PANEL WHITE L 600 x 360 A mm	WTP00290 BACK PANEL WHITE L 900 x 360 A mm	WTP00220 BACK PANEL WHITE L 1200 x 360 A mm	WTP00250 BACK PANEL WHITE L 1500 x 360 A mm	WTP00280 BACK PANEL WHITE L 1800 x 360 A mm
------------------------------------------------------------	------------------------------------------------------------	-------------------------------------------------------------	-------------------------------------------------------------	-------------------------------------------------------------

SERVICES COVERING PANELS

Plastic laminate panel, positioned under the worktop to mask the user connections. Quick coupling system, easily removable for maintenance

WMSVG060 PANEL SERVICE COVERING PANEL WHITE L 600 x 900 A mm	WMSVG090 PANEL SERVICE COVERING PANEL WHITE L 900 x 900 A mm	WMSVG120 PANEL SERVICE COVERING PANEL WHITE L 1200 x 900 A mm	WMSVG150 PANEL SERVICE COVERING PANEL WHITE L 1500 x 900 A mm	WMSVG180 PANEL SERVICE COVERING PANEL WHITE L 1800 x 900 A mm	WMSVG080 PANEL SERVICE COVERING PANEL WHITE ANGOLO
WMSVG060R PANEL SERVICE COVERING WHITE L 600 x 770 A mm	WMSVG090R PANEL SERVICE COVERING WHITE L 900 x 770 A mm	WMSVG120R PANEL SERVICE COVERING WHITE L 1200 x 770 A mm	WMSVG150R PANEL SERVICE COVERING WHITE L 1500 x 770 A mm	WMSVG180R PANEL SERVICE COVERING WHITE L 1800 x 770 A mm	

SUPPLY SETTING SETTING AND DRAIN

ETA_SERIES


PREDISPOSIZIONE TUBAZIONI

PIPE POSITIONING


This page contains some suggestions on how to set up the connections in your lab. The supply pipes can be made of drawn galvanized steel "Mannesmann" and / or stainless steel depending on the fluid. Polyethylene drain pipes "Geberit" or "Nirlene" type.

Waterproof electrical box IP 55 with cables G3 2.5 mm² for socket power supply and single-phase control panel.


Our technical department is at your disposal to help you with the installation, electric, water, drain, and suction connections and to issue the installation compliance certificates according to Ministerial Decree 37/08.




DRAIN PIPES FOR BIG TRAYS
500 x 400 x h 300 mm






To obtain this value subtract 140 mm from the workbench or washing unit dimension



DRAIN PIPES FOR TRAYS
150 x 300 x h 200 mm



To obtain this value subtract 140 mm from the workbench or washing unit dimension

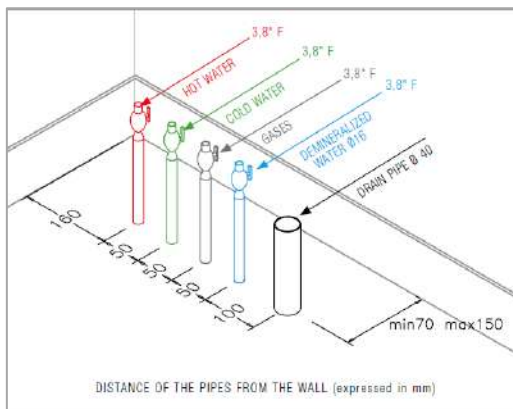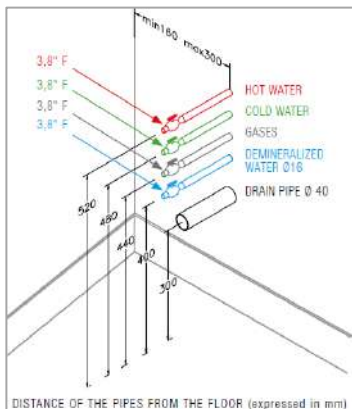

REAGENT SHELVES

Steel tube structure with protection treatment including a pickling and phosphatizing process and the electrostatic application of enamel based on epoxy resin powders (thickness of 100 ±10 micron) light grey color RAL7035 (other colors on request), drying in heating tunnel at 180 °C.

Tray shaped shelves to contain any liquid, anti-fall raised edges for objects and bottles.

Adjustable height, with settings to facilitate alignment, every 35 mm, column height of 740 mm.

The dimensions of the reagent shelf central part for combined bases are 60x60 mm as for the leg.

Laminate or glass worktops and support brackets of different heights can be supplied on request.



COLUMN

WCL006030 Column 60 L x 30 P x 750 A mm	WCL006060 Column 60 L x 60 P x 750 A mm	WCL008080 Column 60 L x 6 P x 750 A mm
------------------------------------------------------	------------------------------------------------------	-----------------------------------------------------

SERIE_ETA

REAGENT SHELVES

WPRE20060 REAGENT SHELF ETA_P L 600 mm	WPRE20090 REAGENT SHELF ETA_P L 900 mm	WPRE20120 REAGENT SHELF ETA_P L 1200 mm	WPRE20150 REAGENT SHELF ETA_P L 1500 mm	WPRE20180 REAGENT SHELF ETA_P L 1800 mm
WPREC20060 REAGENT SHELF ETA_C L 600 mm	WPREC20090 REAGENT SHELF ETA_C L 900 mm	WPREC20120 REAGENT SHELF ETA_C L 1200 mm	WPREC20150 REAGENT SHELF ETA_C L 1500 mm	WPREC20180 REAGENT SHELF ETA_C L 1800 mm

WPRE28081 reagent shelf - corner 750 mm 1 CORNER SIDE

WPRE28080 reagent shelf - corner 750 mm 2 SIDES "L" CORNER

WORKTOP

ALL OUR BENCHES AND TABLES MUST BE FITTED WITH A WORK SURFACE.

**EVERY MATERIAL IS STRICTLY
CONNECTED TO THE TYPE OF PROCESSING AND APPLICATION YOU NEED.**

The wide range of materials and sizes that asem offers, will allow you the maximum performance against heat, chemical attacks and dirt.

For special applications, we can offer tank tops of various sizes and materials with raised edges to prevent spillage of liquids.



WORKTOP

MONOLITHIC GRES

It consists of a large plate with four raised containment edges, a single body without seams or joints. It is manufactured through the moulding of a mixture of clays, pure quartz, kaolin, of monolithic grès are: self-bearingfeldspathic powders and other natural products in one single baking at 1300 °C that makes it particularly resistant.

It is then integrated with an antireflective, cold enameling process of GREY colour to confer the excellent chemical resistance, in addition to characterizing the aesthetics of the product.

Through cooking it obtains a perfectly smooth, even surface, easy to wash and decontaminate, as well as an exceptional resistance to chemical agents, solvents and thermal and mechanical stresses.

It resists corrosion of acids, alkalis, salts and solvents at all concentrations, but it is scarcely resistant to hydrofluoric acid.

The monolithic grès worktops have a high mechanical resistance and a good thermal shock resistance and are non-flammable.

Characteristics according to DIN 12916.

Special features of the worktop capacity; absence of junctions; high chemical inertness; ease of replacement; ease of cleaning, decontamination and disinfection.

Dimensions: 750 depth, 38 mm thickness.



Dimension: depth 600 o 750 mm Tk 28-30 mm

GRESLAM 3

Worktop consisting of a slab of grès, with thickness of 3 mm, of light grey colour, structurally reinforced with a mat of glass fiber. Perfectly smooth surface with high chemical resistance, resistant to acids, bases, solvents, disinfectants and detergents (except hydrofluoric acid). The surface is compatible with food, it does not produce any mildew, bacteria or fungi. Excellent resistance to mechanical wear, scratches and abrasions. Resistant to fire and high temperature, in case of fire it does not emit any smoke or toxic substances.

Product of natural origin, it does not pollute the environment, it can be ground and recycled in other manufacturing processes.

It rests on a waterproof chipboard panel, coated on both sides with fireproof plastic melamine laminate F1. Dimensions: depth 750, thickness 30 mm.



Raised PVC grey edging to contain any liquid.



Rounded ABS edging thickness 3 mm

Dimension: depth 600 o 750 mm Tk 30-38 mm

WORKTOP

ACRYLIC RESIN

Worktop with raised edges for the containment of liquids.

Composite product composed of acrylic resin and mineral charges. Sheet with integrated perimeter edges, integral material throughout the thickness of 6 mm with integrated side edges, a homogeneous material throughout the thickness, particularly versatile with excellent aesthetic qualities. Particularly durable

and versatile, ideal for technical use. High resistance to impact, wear and stress. Excellent resistance to stains, UV rays, acids and surface scratch. Standard color: light grey, upon request it is available in a wide range of colors and grains. Solid material not subject to delamination.

On request we can carry out worktops with invisible joints, thus obtaining an elegant monolithic aspect. Since it is a non-porous material, it prevents the formation of mildew and bacteria.

Environmentally friendly, non-toxic, inert, hypoallergenic.

It is fireproof and does not produce any toxic fumes. It rests on a waterproof chipboard panel, coated on both sides with fireproof plastic melamine laminate F1.

Dimensions: depth 750, thickness 38 mm.



Dimensioni: profondità 600 o 750 mm
spessore 38 mm


PORCELAIN ENAMELED STEEL

Porcelain vitrified steel worktop, equipped with 4 molded anti-overflow edges, obtained through a special decarbonized steel sheet, thickness 10/10. The porcelainizing is carried out with acid-resistant enamels of class "AA" in compliance with PEI rules (Porcelain Enamel Institute of Washington) S-100/65 (ISO 2722) and subject to double cooking in the furnace at 820 °C, colour RAL9010.

The enameling provides excellent resistance to all common chemicals. Oils, acids, iodine and stains of various kinds can be removed by common cleaning products. Solvents and abrasive powders do not penetrate, do not scratch and do not alter the surface. Inner support with stiffening and sound-deadening function, made of polyurethane injected at high pressure.

Counter-plating of hot-galvanized steel sheet.

Dimensions: depth 750, 45 mm thickness.



Dimensioni: profondità 600 o 750 mm
spessore 45 mm

WORKTOP


STAINLESS STEEL

Stainless steel AISI 316 18/10 worktop with 4 anti-overflow edges, a perfectly smooth surface, without junctions. It is obtained through molding and welding performed electrically in an inert gas atmosphere to ensure the absolute lack of porosity (ARGON process). The upper surface of the worktop is finely glazed, or machined with the Scotchbrite procedure, which allows obtaining a micro-roughness similar to mirror polishing, ideal to prevent the formation of colonies of bacteria or the aggression of chemical agents.

The specifications on the corrosion resistance of stainless steel are provided on request. Sheets used for the execution of the worktops comply with regulations UNI: 6900-71; 3992; 7500; 7660; 8317 and with the criteria listed in the manual of the American Iron and Steel Institute (AISI).

The lower support on which the stainless steel sheet is fixed is made of fireproof chipboard with perimeter shimming.

Dimensions: depth 750, thickness 38 mm.



Dimension: depth 600 o 750 mm Thickness 38 mm

POLYPROPYLENE

Injection-molded worktop equipped with 4 perimeter edges for the containment of liquids. 10 mm thick, with lower support in fireproof particleboard panel with stiffening and sound-deadening function.

Excellent chemical resistance to acids and alkali, not suitable for use with very aggressive solvents, suitable for temperatures up to 140 °C.

Good mechanical resistance thanks to ease of shock absorption.

Dimensions: depth 750, thickness 38 mm.



Dimension: 750 depth, 38 thickness mm

GLASS + LAMINATE

Worktop of hardened glass, thickness 6 mm, perfectly smooth, chemically and biologically inert (not suitable for use with HF).

Supported by a waterproof chipboard panel, coated on both sides with a fireproof plastic melamine laminate.

Rounded shockproof ABS edging of grey colour, thickness 3 mm.

Dimensions: depth 750, thickness 31 mm.



Dimension: depth 600 o 750 mm Thickness 31 mm

WORKTOP

LAMINATE HPL TRESPA TOPLAB PLUS

Bearing panel, consisting of thermosetting resins evenly reinforced with wood-based fibers, manufactured under high temperature and pressure conditions.

The decorated surface is obtained by using a patented technology. This technology guarantees the non-porosity of the surface that prevents the growth of bacteria, mildew and microorganisms. Excellent resistance to many aggressive chemicals normally used in chemical, microbiological and didactic laboratories.

The test sheets can be supplied on request.

The surface has excellent wear resistance and a solid and lasting structure that keeps an attractive appearance for years. Ideal for flexible and dynamic environments, it allows you to quickly transform the design of the laboratory.

This material is extremely easy to adapt to the specific needs of the laboratory.

You can insert sinks, carry out holes and add other fittings.

Once installed, it can be easily adapted to new work needs. You can make new cuts and fit new taps, sinks or other equipment, without prejudicing the exceptional performance or aesthetic characteristics.

It is an ecological product. A method is used to transform soft wood originating from certified forests into an attractive, durable, resistant material: it is the ecological solution for the worktops of the laboratories of today and tomorrow.

Dimension depth 600 o 750 mm, Thickness 16 mm

WORKTOP

PLASTIC LAMINATE

Made with a clipboard support waterproof, coated on both sides with flame-retardant melamine plastic laminate class 1, anti-scratch quartz finish or, consisting of from sheets of kraft paper impregnated with resin phenolic, from a decorative upper sheet WHITE color impregnated with melamine resin, subjected to the action combined pressure (90 kg / cmq) and heat (150 °), in special presses where the polycondensation of resins. Class compliant formaldehyde content 1 according to EN120. The surface offers good resistance to acids and weak foundations. Shockproof perimeter edging in thick ABS 3 mm rounded.

Dimensions: Depth: 600 o 750 mm

Thickness: 30 mm for lab benches and desk

EPOXY RESIN

Top with or without perimeter edges raised for the containment of any spills.

Designed to meet the requirements of resilience, safety, functionality and design requests in chemical laboratories.

Composite inert material consisting of silicates, epoxy resin and pigments.

Homogeneous in all thickness, offers versatility design, aesthetic quality, functionality and durability.

Excellent water resistance, stagnant moisture and steam.

Self-supporting with good physical performance mechanical.

Resistant to stains, UV rays and most acids (not suitable to be used with hydric and sulphury acid concentrate) has been subjected to specific tests the results of these tests are available on request.

Supplied standard color BLACK (on request LIGHT GREY or other colors).

It's a solid material and it's not subject to delamination.

Non-porous, mold and bacteria do not find holds.

Inert, non-toxic, hypoallergenic and self-extinguishing.

Can be integrated with tanks.

Dimensions: depth 600 or 750 mm 30 mm thickness for laboratory benches or 30 for tables and desks

Dimensions:

Dimensions

Standard 750, 1200, 1500, 1800 mm

Depth 600 o 750 mm

Thickness 16/19 mm

WORKTOPS

PLASTIC LAMINATED	GRES MONOLITICO	POLYPROPYLENE	HPL	STAINLESS STEEL AISI 316	PORCELAIN ENAMELED STEEL
PL43060 600 B x 750 A mm	PL4701 600 B x 750 A mm	PL4901 600 B x 750 A mm	PL4606 600 B x 750 A mm	PL4506 600 B x 750 A mm	-
PL4330* 600 B x 600 A mm	PL4701/60* 600 B x 600 A mm	PL4901/60* 600 B x 600 A mm	PL4606/60* 600 B x 600 A mm	PL4506* 600 B x 600 A mm	-
PL4399 900 B x 750 A mm	PL4702 900 B x 750 A mm	PL4902 900 B x 750 A mm	PL4609 900 B x 750 A mm	PL4502 900 B x 750 A mm	-
PL4399/60 900 B x 600 A mm	PL4702/60 900 B x 600 A mm	PL4902/60 900 B x 600 A mm	PL4609/60 900 B x 600 A mm	PL4502/60 900 B x 600 A mm	-
PL43332 1200 B x 750 A mm	PL4704 1200 B x 750 A mm	PL4904 1200 B x 750 A mm	PL4604 1200 B x 750 A mm	PL4504 1200 B x 750 A mm	CER120 1200 B x 750 A mm
PL4333 1200 B x 600 A mm	PL4704/60 1200 B x 600 A mm	PL4904/60 1200 B x 600 A mm	PL4604/60 1200 B x 600 A mm	PL4504/60 1200 B x 600 A mm	-
PL4335 1500 B x 750 A mm	PL4750 1500 B x 750 A mm	PL4915 1500 B x 750 A mm	PL4650 1500 B x 750 A mm	PL4515 1500 B x 750 A mm	-
PL4336 1500 B x 600 A mm	PL4750/60 1500 B x 600 A mm	PL4915/60 1500 B x 600 A mm	PL4650/60 1500 B x 600 A mm	PL4515/60 1500 B x 600 A mm	-
PL4339 1800 B x 750 A mm	PL4718 1800 B x 750 A mm	PL4918 1800 B x 750 A mm	PL4618 1800 B x 750 A mm	PL4518 1800 B x 750 A mm	CER180 1800 B x 750 A mm
PL4341 1800 B x 600 A mm	PL4718/60 1800 B x 600 A mm	PL4918/60 1800 B x 600 A mm	PL4618/60 1800 B x 600 A mm	PL4518/60 1800 B x 750 A mm	-

CORNER WORKTOPS 810x810 mm

PLASTIC LAMINATED	GRES MONOLITICO	POLYPROPYLENE	HPL	STAINLESS STEEL AISI 316	PORCELAIN ENAMELED STEEL
PL4376 750 B x 750 A mm	PL4775 750 B x 750 A mm	PL4975 750 B x 750 A mm	PL4675 750 B x 750 A mm	PL4575 750 B x 750 A mm	-

*Corner worktops 660x660 mm (see worktops 600x600 mm)

WORKTOPS

ACRILIC RESIN	EPOSSIDI RESIN	EPOSSIDI RESIN WITH EDGE	GRESLAM 3	GRESLAM WITH PVC EDGE	LAMINATE + GLASS	LAMINATE + GLASS WITH EDGE
PL4806 600 B x 750 A mm	–	–	PL44060 600 B x 750 A mm	PL44560 600 B x 750 A mm	PLV60 600 B x 750 A mm	PLV60B 600 B x 750 A mm
PL4806/60* 600 B x 600 A mm	–	–	PL44066* 600 B x 600 A mm	PL44566* 600 B x 600 A mm	PLV66* 600 B x 600 A mm	PLV66B* 600 B x 600 A mm
PL4809 900 B x 750 A mm	–	–	PL44090 900 B x 750 A mm	PL44590 900 B x 750 A mm	PLV90 900 B x 750 A mm	PLV90B 900 B x 750 A mm
PL4809/60 900 B x 600 A mm	–	–	PL44096 900 B x 600 A mm	PL44596 900 B x 600 A mm	PLV96 900 B x 600 A mm	PLV96B 900 B x 600 A mm
PL4812 1200 B x 750 A mm	PL5112 1200 B x 750 A mm	PL5012 1200 B x 750 A mm	PL44120 1200 B x 750 A mm	PL44620 1200 B x 750 A mm	PLV120 1200 B x 750 A mm	PLV120B 1200 B x 750 A mm
PL4812/60 1200 B x 600 A mm	–	–	PL44126 1200 B x 600 A mm	PL44526 1200 B x 600 A mm	PLV126 1200 B x 600 A mm	PLV126B 1200 B x 600 A mm
PL4815 1500 B x 750 A mm	PL5115 1200 B x 750 A mm	PL5015 1200 B x 750 A mm	PL44150 1500 B x 750 A mm	PL44650 1500 B x 750 A mm	PLV150 1500 B x 750 A mm	PLV150B 1500 B x 750 A mm
PL4815/60 1500 B x 600 A mm	–	–	PL44156 1500 B x 600 A mm	PL44556 1500 B x 600 A mm	PLV156 1500 B x 600 A mm	PLV156B 1500 B x 600 A mm
PL4818 1800 B x 750 A mm	PL5118 1200 B x 750 A mm	PL5018 1200 B x 750 A mm	PL44180 1800 B x 750 A mm	PL44680 1800 B x 750 A mm	PLV180 1800 B x 750 A mm	PLV180B 1800 B x 750 A mm
PL4818/60 1800 B x 600 A mm	–	–	PL44186 1800 B x 600 A mm	PL44586 1800 B x 600 A mm	PLV186 1800 B x 600 A mm	PLV186B 1800 B x 600 A mm

CORNER WORKTOPS 810x810 mm

ACRILIC RESIN	EPOSSIDI RESIN	EPOSSIDI RESIN WITH EDGE	GRESLAM 3	GRESLAM WITH PVC EDGE	LAMINATE + GLASS	LAMINATE + GLASS WITH EDGE
PL4875 750 B x 750 A mm	PL5175 750 B x 750 A mm	PL5075 750 B x 750 A mm	PL4475 750 B x 750 A mm	PL44675 750 B x 750 A mm	PLV75 750 B x 750 A mm	PLV75B 750 B x 750 A mm

*Corner worktops 660x660 mm (note worktops 600x600 mm)

WORKTOPS FOR SINK

GRESLAM WITH ABS EDGE TK 30 mm	GRESLAM WITH PVC EDGE	LAMINATED AND GLASS WITH ABS EDGE TK. 30 mm	LAMINATED AND GLASS WITH PVC EDGE	STAINLES STEEL 316	HPL	MONOLITIC GRESS TK. 28/32 mm	ACRYLIC RESIN
PL44121 1200Lx750Pmm Central sink (150x300PPgrigio)	PL44621 1200Lx750Pmm Central sink (150x300PPgrey)	PLV91 900Lx750Pmm Central sink (150x300PP)	PLV91B 900Lx750Pmm Central sink (150x300PP)	PL4503 900Lx750Pmm Central Sink (150x300)	PL4610 900Lx750Pmm Central sink (150x300PP grey)	PL4705 1200Lx750Pmm vasca CENTRALE (150x300PPgrigio)	PL4814 1200Lx750Pmm Central sink (150x300grey)
PL44121A 1200Lx750Pmm Right sink (150x300PPgrey)	PL44621A 1200Lx750Pmm Right sink (150x300PPgrigio)	PLV90A 900Lx750Pmm Right sink (150x300PP)	PLV90BA 900Lx750Pmm Right sink (150x300PP)	PL4505 1200Lx750Pmm Central Sink (150x300)	PL4610D 900Lx750Pmm Right sink (150x300PPgrey)	PL4705A 1200Lx750Pmm Right sink (150x300PPgrigio)	PL4814A 1200Lx750Pmm Right sink (150x300grigio)
PL44121AS 1200Lx750Pmm Left sink (150x300PPgrigio)	PL44621AS 1200Lx750Pmm Left sink (150x300PPgrigio)	PLV121 1200Lx750Pmm Central sink (150x300PP)	PLV121B 1200Lx750Pmm Central sink (150x300PP)	PL4512D 1200Lx750Pmm Right sink (400x500)	PL4610S 900Lx750Pmm Left sink (150x300PPgrey)	PL4705AS 1200Lx750Pmm Left sink (150x300PPgrey)	PL4814AS 1200Lx750Pmm Left sink (150x300grey)
PL44130 1200Lx750Pmm Right/left sink (400x500PP grey)	PL44630 1200Lx750Pmm Right/left sink (400x500PP grigio)	PLV120A 1200Lx750Pmm Right sink (150x300 PP)	PLV120BA 1200Lx750Pmm Right sink (400x500 PP)	PL4512S 1200Lx750Pmm Left sink (400x500)	PL4605 1200Lx750Pmm Central sink (150x300PP grey)	PL4791 1200Lx750Pmm Left sink (400x500gres grey)	PL4817 1500Lx750Pmm Central sink (150x300grey)
PL44151 1500Lx750Pmm Central sink (150x300PPgrigio)	PL44651 1500Lx750Pmm Central sink (150x300PP grey)	PLV120AS 1500Lx750Pmm Left sink (150x300PP)	PLV120BAS 1500Lx750Pmm Left sink (150x300PP)	PL4516 1500Lx750Pmm Central sink (150x300PP)	PL4605D 1200Lx750Pmm Right sink (150x300PPgrey)	PL4790 1200Lx750Pmm Left sink (400x500gres grey)	PL4817A 1500Lx750Pmm Right sink (150x300grey)
PL44151A 1500Lx750Pmm Right sink (150x300PP grey)	PL44651A 1500Lx750Pmm Right sink (150x300PPgrigio)	PLV151 1500Lx750Pmm Central sink (150x300PP)	PLV151B 1500Lx750Pmm Central sink (150x300PP)	PL4550D 1500Lx750Pmm Right sink (400x500)	PL4605S 1200Lx750Pmm vascaSX (150x300PPgrigio)	PL4751 1500Lx750Pmm Central sink (150x300PPgrigio)	PL4817AS 1500Lx750Pmm Right sink (150x300grigio)
PL44151AS 1500Lx750Pmm Left sink (150x300PP grey)	PL44651AS 1500Lx750Pmm Right sink (150x300PP grey)	PLV150A 1500Lx750Pmm Right sink (150300PP)	PLV150BA 1500Lx750Pmm Right sink (150x300PP)	PL4550S 1500Lx750Pmm Left sink (400x500)	PL4612DS 1200Lx750Pmm Right/left sink (400x500PP grey)	PL4751A 1500Lx750Pmm Right sink (150x300PPgrey)	PL4820 1800Lx750Pmm Central sink (150x300 grigio)
PL44160 1500Lx750Pmm Right/left sink (400x500PPgrigio)	PL44660 1500Lx750Pmm vasca DX / SX (400x500PPgrigio)	PLV150AS 1500Lx750Pmm Left sink (150x300 PP)	PLV150BAS 1500Lx750Pmm Left sink (150x300 PP)	PL4519 1800Lx750Pmm sink CENTRALE (150x300)	PL4655 1500Lx750Pmm vasca CENTRALE (150x300PPgrigio)	PL4751AS 1500Lx750Pmm (150x300PP grey)	PL4820A 1800Lx750Pmm Right sink (150x300grey)
PL44181 1800Lx750Pmm Central sink (150x300PPgrigio)	PL44681 1800Lx750Pmm Central sink (150x300PPgrigio)	PLV181 1800Lx750Pmm Central sink (150x300PP)	PLV181B 1800Lx750Pmm Central sink (150x300PP)	PL4520 1800Lx750Pmm Right sink (400x500)	PL4655D 1500Lx750Pmm Right sink (150x300PP grey)	PL4755 1500Lx750Pmm Right sink (400x500gres grey)	PL4820AS 1800Lx750Pmm Left sink (150x300grey)
PL44181A 1800Lx750Pmm Right sink (150x300PPgrigio)	PL44681A 1800Lx750Pmm Right sink (150x300PPgrigio)	PLV180A 1800Lx750Pmm Right sink (150x300PP)	PLV180BA 1800Lx750Pmm Right sink (150x300PP)	PL4521 1800Lx750Pmm Left sink (400x500)	PL4655S 1500Lx750Pmm Left sink (150x300PP grey)	PL4756 1500Lx750Pmm Left sink (400x500gres grey)	-
PL44181AS 1800Lx750Pmm Left sink (150x300PPgrigio)	PL44681AS 1800Lx750Pmm Left sink (150x300PPgrigio)	PLV180AS 1800Lx750Pmm Left sink (150x300PP)	PLV180BAS 1800Lx750Pmm Left sink (150x300PP)	-	PL4615DS 1500Lx750Pmm Right/left sink (400x500PP grey)	PL4719 1800Lx750Pmm Central sink (150x300PP grey)	-
PL44190 1800Lx750Pmm Right/left sink (400x500PP grey)	PL44695 1800Lx750Pmm Right/left sink (400x500PP grey)	-	-	-	PL4619 1800Lx750Pmm Central sink (150x300PP grey)	PL4708A 1800Lx750Pmm Right sink (150x300PP grey)	-
-	-	-	-	-	PL4619D 1800Lx750Pmm Right sink (150x300PPgrigio)	PL4708AS 1800Lx750Pmm Left sink (150x300PP grey)	-
-	-	-	-	-	PL4619S 1800Lx750Pmm Left sink (150x300PPgrigio)	PL4778 1800Lx750Pmm Right/left sink (400x500gres grigio)	-
-	-	-	-	-	PL4618DS 1800Lx750Pmm Right/left sink (400x500PP grey)	PL4779 1800Lx750Pmm Left sink (400x500gres grey)	-



WASHING UNIT

Simplifying the quality of work and optimizing its processes is an ambitious goal.

Also in our washing units you will find the most appropriate solution for your use, having the possibility to choose whether to use the taps on the working surface or on the front lift.

Ergonomics and intuitive controls will make your operations easier.



ETA_SERIES

WASGHING UNIT BASEMENT

ETA_SERIES

MODULAR METAL BASE

Bearing structure with “C” frame system made of pickled steel tube painted with epoxy powders with passage through heating tunnel at 200 °C. It is equipped with side infill panels.

WORKTOP

with containment edges and tray 400 x 500 x h 300 mm.

UNDER-SINK MODULE

Structure and doors made of waterproof particleboard panel coated with fireproof HPL plastic melamine laminate class 1 blue. Rounded shockproof ABS grey edging, 3 mm thick.





Steel handles coated with light grey epoxy paint.

Steel support painted with epoxy powders with passage through heating tunnel at 200 °C. It is assembled on a baseboard with adjustable feet.

FITTINGS

Mixer tap with basin valve bodies and swivel spout for cold/hot water, wastepaper bin and plastic siphon

CENTRAL BASEMENT FOR CENTRAL / ISLAND BENCH



WETP00061 600 L x 810 P x 900 A mm	WETP00121 1200 L x 810 P x 900 A mm	WETP00151 1500 L x 810 P x 900 A mm	WETP00181 1800 L x 810 P x 900 A mm
WETP00063 600 L x 660 P x 900 A mm	WETP00123 1200 L x 660 P x 900 A mm	WETP00153 1500 L x 660 P x 900 A mm	-

CENTRAL BASEMENT FOR CENTRAL / ISLAND BENCH

WETP00064 600 L x 1260 P x 900 A mm	WETP00065 600 L x 1560 P x 900 A mm	-	-
-----------------------------------------------	-----------------------------------------------	---	---

FITTINGS WASCHING UNIT

| **ETA**_SERIES

PLEXIGLASS SPLASH PROTECTION PANEL

AC931 600 mm	AC930 750 mm	AC932 1200 mm	AC935 1500 mm	AC939 1560 mm	AC936 1650 mm	AC933 1800 mm
------------------------	------------------------	-------------------------	-------------------------	-------------------------	-------------------------	-------------------------

PREDISPOSITION FOR DISHWASHER MACHINE

AC921 WALL 900 mm	AC922 WALL 1200 mm	AC925 WALL 1500 mm	AC928 WALL 1800 mm
-----------------------------	------------------------------	------------------------------	------------------------------

COLUMNS

WCL006030 COLUMN 60 x 30 mm - Altezza 750 mm	WCL006060 CENTRAL COLUMN 60 x 60 mm - HEIGHT 750 mm
--------------------------------------------------------	---------------------------------------------------------------

COLUMNS FOR DRAINING RACK AND SUCTION

WPREAC91760 600 mm	WPREAC91790 900 mm	WPREAC917120 1200 mm	WPREAC917150 1500 mm	WPREAC917180 1800 mm
------------------------------	------------------------------	--------------------------------	--------------------------------	--------------------------------

DRAINING RACK

AC917 In materiale plastico	AC915 In acciaio INOX 60
---------------------------------------	------------------------------------

Made of shockproof polystyrene, with 72 holes to insert the corresponding pegs eliminating leakage and consequent biohazards. The seamless drip channel collects waste which drains via drain tube provided.

It is equipped with 72 push in pegs which can be removed easily to accommodate particularly shaped items.



WASTE BIN Cod. AC940

UNLOADING DEVICE / SCALE WITH ALARMS Cod. AC801

LOADING/UNLOADING DEVICE MIX 12V WITH 2 JERRY CANS 20 L Cod. AC840

FITTINGS VERTICAL SERVICE PANEL

ETA_SERIES

VERTICAL SERVICE PANELS


The Service Panel ASEM ³ (optional accessory) is ideal for the distribution of electricity and technical gases.

Enhancing the ease of use and accessibility to the elements is the basis for achieving results by optimizing space and time.



The vertical service panel is ideal for both wall-mounted benches and central islands.

The service panel, height 360 mm, in epoxy coated sheet metal is placed above the worktop, side columns height 740 mm.

Predisposition for taps, 28 mm diameter holes with removable plastic caps and electrical utilities through the placement of IP55 watertight boxes.

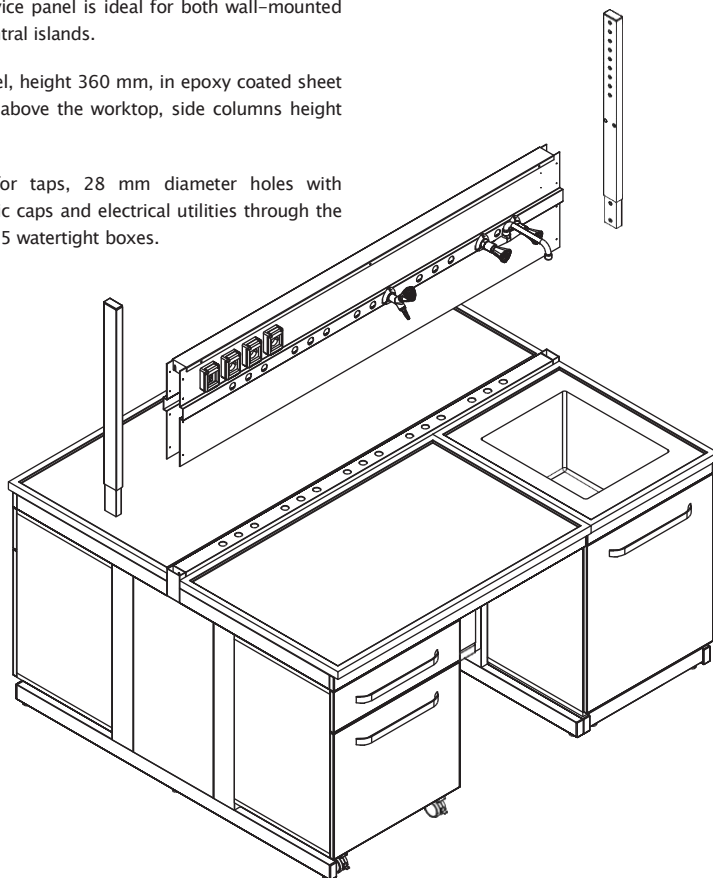

VERTICAL SERVICE PANEL - OPTIONAL FITTINGS



WPP20060 VERTICAL SERVICE PANEL ETA_P 600 B x 395 A mm	WPP20090 VERTICAL SERVICE PANEL ETA_P 900 B x 395 A mm	WPP20120 VERTICAL SERVICE PANEL ETA_P 1200 B x 395 A mm	WPP20150 VERTICAL SERVICE PANEL ETA_P 1500 B x 395 A mm	WPP20180 VERTICAL SERVICE PANEL ETA_P 1800 B x 395 A mm
WPC20060 VERTICAL SERVICE PANEL ETA_C 600 B x 395 A mm	WPC20090 VERTICAL SERVICE PANEL ETA_C 900 B x 395 A mm	WPC20120 VERTICAL SERVICE PANEL ETA_C 1200 B x 395 A mm	WPC20150 VERTICAL SERVICE PANEL ETA_C 1500 B x 395 A mm	WPC20180 VERTICAL SERVICE PANEL ETA_C 1800 B x 395 A mm



SERVICES FITTINGS

The strongest points of ASEM³ furniture are the possibility to be customized with a wide range of accessories, according to the users' needs.

The service bar and the lift are at your disposal to accommodate taps, electrical turrets for sockets, switches, data outlets or valves for technical gases, pressure reducers and emergency showers.

Everything is easily accessible on the work floor, with the advantage of being able to choose the configuration that suits you, but also to modify and expand the layout later.



ETA_SERIES











**ELECTRIC
SERVICE**

ETA_SERIES









ELECTRICAL TURRET FOR SOCKETS AT WORKTOP LEVEL

					
RB9986 TURRET 1 PLACE 1 SOCKET	RB9991 TURRET 1 PLACE 1 SWITCH	RB9987 TURRET 2 PLACES 2 SOCKETS	RA9988 TURRET 2 SIDES 2 SOCKETS	RB9992 TURRET 2 SIDES 2 SWITCH	RB9989 TURRET 2 SIDES 4 SOCKETS

	
RB9984 TURRET 2 SIDES 2 SOCKETS + SWITCH	RB9996 TURRET 1 SIDE4 DATA

SOCKETS FOR WALL SERVICE PANEL

					
R4001 SOCKET EE 220V UNEL	R4010 MAGNETHOTERMIC SWITCH	R4020 DIFFERENTIAL MAGNETOTHERMIC CIRCUIT BREAKER	RJ45 DATA SOCKETS	RJ41 TELEPHONE SOCKET	R4001R SOCKET EE 220V UNEL RED LINE





TAPS

Our range of taps complies with the strictest standards.

They are obtained from a brass pipe according to standard EN 12168 and from solid brass bars according to standard EN 12164. The spout can be disassembled according to standards DIN 12898. The handwheels are made of acid-resistant polypropylene and their color code complies with standard EN 13792. The thread complies with standard ISO228/1, tolerance class B. (Standard with 3/8" connection).

The taps complies with standard DIN 12918.

The maximum operating pressure of the water taps is 7 bar.









The demineralized water taps have an internal nickel coating with a thickness of 17 micron.

The fuel gas taps are tested at a pressure of 0.2 bar; they are equipped with safety trip and they are certified DIN DVGW. The technical gas taps are equipped with a fine adjustment PTFE head, with a maximum operating pressure of 7 bar.



TAPS

WATER TAPS AT THE WORKTOP LEVEL

					
RB700F "L" SHAPE WATER COLUMN	RB711F "L" SHAPE WATER COLUMN BIG TRAYS	RB704F "T" SHAPE WATER COLUMN 2 TRAYS	RB703F PP "L" SHAPE DEMINERALIZED WATER COLUMN 150 mm - 1 m PIPE PE	RB706F PP "L" SHAPE DEMINERALIZED WATER COLUMN 250 mm - 1 m PIPE PE	RB708F WATER MIXER TAP 1 SIDE
					
RB708LCF SINGLE LEVEL MIXER TAP	RB1707F WATER MIXER	RB908AB WATER MIXER ANTIBACTERIC KIT	RB910AB WATER TAP BIG TRAYS ANTIBACTERIC KIT		





WATER TAPS FOR VERTICAL SERVICE PANELS

					
RA221F WATER COLUMN	RA231F WATER COLUMN WALL 250 mm	RA223F WATER COLUMN 2 TAPS	RA225FPP WATER COLUMN DIMINERALIZED	RA231DFPP WATER COLUMN TRAYS	RA224F WALL MIXER TAP

RA224LCF WALL MIXER WITH CLINIC LEVER



GAS TAP AT THE WORKTOP LEVEL

			
RB600F GAS COLUMN 1 TAP SAFETY DEVICE	RB601F GAS COLUMN 2 TAPS 180° SAFETY DEVICE	RB603F GAS COLUMN 2 TAPS 90° SAFETY DEVICE	RB602F GAS COLUMN 4 TAPS SAFETY DEVICE

GAS TAP FOR VERTICAL SERVICE PANELS

	
RA201F WALL GAS TAP 1 TAP SAFETY DEVICE	RA206F WALL GAC TAP 2 TAPS SAFETY DEVICE

VACUUM COLUMN TAPS AT THE WORKTOP LEVEL

**RB605F**VACUUM COLUMN
1 TAP**RB608F**VACUUM COLUMN
2 TAPS 90°**RB606F**VACUUM COLUMN
2 TAPS 180°**RB607F**VACUUM COLUMN
4 TAPS

RUBINETTERIE VUOTO A PARETE

**RA203 F**WALL VACUUM TAP
1 TAP**RA208F**WALL VACUUM TAP
2 TAPS

NITROGEN TAP AT THE WORKTOP LEVEL

**RB610F**NITROGEN COLUMN TAP
1 TAP**RB613F**NITROGEN COLUMN
2 TAPS 90°**RB611F**NITROGEN COLUMN
2 TAPS 180°**RB612F**NITROGEN COLUMN
4 TAPS 4

NITROGEN TAP FOR VERTICAL SERVICES PANELS

**RA204F**NITROGEN WALL TAP
1 TAP**RA209F**NITROGEN WALL TAP
2 TAPS

AIR TAP AT THE WORKTOP LEVEL

**RB615F**

AIR COLUMN TAP 1 TAP

RB618F

AIR COLUMN 2 TAPS 90°

RB616F

AIR COLUMN 2 TAPS 180°

RB617F

AIR COLUN 4 TAPS 4

AIR TAP FOR VERTICAL SERVICES PANELS

**RA202F**WALL AIR TAP
1 TAP**RA202F**WALL AIR
2 TAPS

PRESSURE REDUCER AT THE WORKTOP LEVEL

RPN001F	RPN002F	RPN003F	RPN004F	RPN005F	RPN006F	RPN007F	RPN008F	RPN009F
PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER
2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE
PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE
NITROGEN	HELIUM	AIR	VACUUM	ACETYLENE	HYDROGEN	NITROUS OXIDE	OXYGEN	ARGON



PRESSURE REDUCER FOR VERTICAL SERVICES PANELS

RPN0011F	RPN0012F	RPN0013F	RPN0014F	RPN0015F	RPN0016F	RPN0017F	RPN0018F	RPN0019F
PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER	PRESSURE REDUCER
2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE	2" STAGE
PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE	PRESSURE GAUGE
NITROGEN	HELIUM	AIR	VACUUM	ACETYLENE	HYDROGEN	NITROUS OXIDE	OXYGEN	ARGON





UNDER BENCH CABINETS

The cabinets made by ASEM[®] are available in laminate of the highest quality to ensure excellent water resistance and durability over time.

Details make a difference.

That's why we give them the right importance and in the development of technical furniture are fundamental even the smallest components.

The attention and research on materials, their shape and practicality are essential elements to produce a high-level working environment.

The world is full of colors, so your lab can be too!

We give the possibility to choose, from our palette, the color of the front that you prefer, to make your furniture even more unique.

UNDER BENCH CABINETS



Structure and doors in waterproof chipboard, E1 class as to formaldehyde emission, coated on both sides with fireproof plastic melamine laminate CLASS 1 with scratch-resistant quartz finishing made of sheets of kraft paper impregnated with phenolic resin, an upper decorative blue* (other colors on request) sheet of paper impregnated with melamine resin, exposed to the combined action of pressure and heat. Rounded shockproof ABS edging of grey color, 3 mm thick.

Doors with hinges with 168° opening. They can be supplied in class « 0 » execution made of steel coated with anti-acid epoxy paint. Drawers with sliding guides on ball bearings, with anti-tilt end stop. Steel handles coated with epoxy paint light grey colour with passage through heating tunnel at 180 °C.

Steel support painted with epoxy powders, with 4 pivoting rubber wheels 2 of which with brake.

ETM000XX* = blue *G = grey *Y = yellow *V = green *B = white *O = orange – MS000XX**

Certified EN14727 by Bureau Veritas

Certified EN16121 by Bureau Veritas



UNDER BENCH CABINET



WMS00001 600 B x 680 A mm (790 A mm on wheels) 1 DOOR RIGHT - 1 SHELF	WMS00011 900 B x 680 A mm (790 A mm on wheels) 2 DOORS - 2 SHELVES	WMS00004 1200 B x 680 A mm (790 A mm on wheels) 2 DOORS - 2 SHELVES
WMS00001S 600 B x 680 A mm (790 A mm on wheels) 1 DOOR LEFT - 1 SHELF	WMSB0011 900 B x 550 A mm (660 A mm on wheels) 2 DOORS - 2 SHELVES	WMSB0004 1200 B x 550 A mm (660 A mm on wheels) 2 DOORS - 2 SHELVES
WMSB0001 600 B x 550 A mm (660 A mm on wheels) 1 DOOR RIGHT - 1 SHELF	-	-
WMSB0001S 600 B x 550 A mm (660 A mm on wheels) 1 DOOR LEFT - 1 SHELF	-	-



WMS00002 600 B x 680 A mm (790 A mm on wheels) 1 DOOR RIGHT - 1 SHELF - 1 DRAWER	WMS00025 900 B x 680 A mm (790 A mm on wheels) 2 DOORS - 2 SHELVES - 2 DRAWERS	WMS00005 1200 B x 680 A mm (790 A mm on wheels) 2 DOORS - 2 SHELVES - 2 DRAWERS
WMS00002S 600 B x 680 A mm (790 A mm on wheels) 1 DOOR LEFT - 1 SHELF - 1 DRAWER	WMSB0025 900 B x 550 A mm (660 A mm on wheels) 2 DOORS - 2 SHELVES - 2 DRAWERS	WMSB0005 1200 B x 550 A mm (660 A mm on wheels) 2 DOORS - 2 SHELVES - 2 DRAWERS
WMSB0002 600 B x 550 A mm (660 A mm on wheels) 1 DOOR LEFT - 1 SHELF - 1 DRAWER	-	-
WMSB0002S 600 B x 550 A mm (660 A mm on wheels) 1 DOOR LEFT - 1 SHELF - 1 DRAWER	-	-



WMS00003 600 B x 680 A mm (790 A mm on wheels) 4 DRAWERS	WMS00050 900 B x 680 A mm (790 A mm on wheels) 2 DOORS - 1 SHELF - 1 DRAWER	WMS00024 1200 B x 680 A mm (790 A mm on wheels) 2 DOORS - 1 SHELF - 1 DRAWER
WMS00003C 600 B x 680 A mm (790 A mm on wheels) 4 DRAWER - CENTRAL	WMSB0050 900 B x 550 A mm (660 A mm on wheels) 2 DOORS - 1 SHELF - 1 DRAWER	WMSB0024 1200 B x 550 A mm (660 A mm on wheels) 2 DOORS - 1 SHELF - 1 DRAWER
WMSB0003 600 B x 550 A mm (660 A mm on wheels) 3 DRAWERS	-	-



WMS00010 600 B x 680 A mm (790 A mm on feet-plinth) UNDER SINK ON FEET - 1 DOOR RIGHT	WMS00007 900 B x 680 A mm (790 A mm on feet-plinth) UNDER SINK - ON FEET - 2 DOORS	WMS00008 1200 B x 680 A mm (790 A mm on feet-plinth) UNDER SINK ON FEET - 2 DOORS
WMS00010S 600 B x 680 A mm (790 A mm on feet-plinth) UNDER SINK ON FEET - 1 DOOR LEFT	-	WMS00009 1500 B x 680 A mm (790 A mm on feet-plinth) UNDER SINK - 2 DOORS

REINFORCED LABORATORY TABLE

Benches designed to support important weights. Extremely robust and resistant, can support a weight of 400 kg (CATAS certified).

Functional and practical design to move thanks to the application of reinforced wheels for its construction.

Supporting structure in steel tube 50x50 mm pickled and painted with episodic e powders Pure White RAL9010 (other colors on request), with subsequent passage in the thermal tunnel at 180 ° C.

Steel levelling feet covered with acid-proof plastic material.

Available in width 900 1200, 1500, 1800 mm, and with standard depth 750 and 600 and with 2 heights 770 or 900.

REINFORCED TABLE

WRTT1501 900 L x 750 P x 900 A mm	WRTT1502 1200 L x 750 P x 900 A mm	WRTT1504 1500 L x 750 P x 900 A mm	WRTT1506 1800 L x 750 P x 900 A mm
WRTT1511 900 L x 750 P x 770 A mm	WRTT1512 1200 L x 750 P x 770 A mm	WRTT1514 1500 L x 750 P x 770 A mm	WRTT1516 1800 L x 750 P x 770 A mm
WRTT1541 900 L x 600 P x 900 A mm	WRTT1542 1200 L x 600 P x 900 A mm	WRTT1544 1500 L x 600 P x 900 A mm	WRTT1546 1800 L x 600 P x 900 A mm
WRTT1531 900 L x 600 P x 770 A mm	WRTT1532 1200 L x 600 P x 770 A mm	WRTT1534 1500 L x 600 P x 770 A mm	WRTT1536 1800 L x 600 P x 770 A mm

REINFORCED TABLE ON WHEELS

WRTT1610 900 L x 750 P x 900 A mm	WRTT1602 1200 L x 750 P x 900 A mm	WRTT1604 1500 L x 750 P x 900 A mm	WRTT1608 1800 L x 750 P x 900 A mm
WRTT1601 900 L x 600 P x 900 A mm	WRTT1603 1200 L x 600 P x 900 A mm	WRTT1605 1500 L x 600 P x 900 A mm	WRTT1609 1800 L x 600 P x 900 A mm

ANTI - VIBRATION TABLE

Internal metal frame completely independent from the external masking structure made of hydrophobic chipboard class E1 with regard to the emission of formaldehyde, coated on both sides with CLASSE1 flame retardant melamine plastic laminate.

Top in laminated edging perimeter in ABS thickness 3 mm rounded.

450 x 500 mm polished marble top/s.

Open front compartment for a comfortable operator position.



ANTI VIBRATION TABLE

WTB9010 640 L x 750 P x 770 A mm 1 MARBLE PLATE - CENTRAL	WTB9031D 1200 L x 750 P x 770 A mm 1 MARBLE PLATE - LEFT	WTB9030 1200 L x 750 P x 770 A mm 2 MARBLE PLATES
TB9020 900 L x 750 P x 770 A mm 1 MARBLE PLATE - CENTRAL	WTB9031S 1200 L x 750 P x 770 A mm 1 MARBLE PLATE - LEFT	WTB9031C 1200 L x 750 P x 770 A mm 1 MARBLE PLATE CENTRAL



COMPLEMENTS
HIGH QYALITY
FURNITURE BY
ASEM® TO
COMPLETE THE
INTERIOR OF THE
LABORATORIES



HIGHT CABINETS

Structure with central partition and doors in wood chipboard hydrofuge class E1 with regard to the emission of formaldehyde, coated on both sides with flame-retardant melamine plastic laminate CLASSE1 scratch-resistant quartz finish consisting of sheets of kraft paper impregnated with phenolic resin, a white top decorative sheet (other colors on request) impregnated with melamine resin, subjected to the combined action of pressure and heat.

White shock-proof perimeter edging, rounded 3 mm thick.

Doors with hinges opening 168 in order to avoid contact with the other doors if placed side by side, but allow to have the entire internal surface completely available without any hindrance.

Aluminum handles

Sliding safety glass with aluminum rail profile silver guide, trolleys with window flaps, shelves with adjustable height.

Support frame in steel painted with epoxy powders with subsequent passage in the thermal tunnel at 180 ° C.

Complete with levelling feet.



**CERTIFIED EN
16121
SEVERA
BY BUREAU
VERITAS**



HIGHT CABINETS



GLASS DOOR	PAINE DOORS	OPEN	DOORS	DOORS AND GLASS DOORS
-	-	WR3260G 600 Lx 500 Px 990 A mm	WAR3261 600 Lx 500 Px 1840 A mm	-
WAR3290 900 Lx 480 Px 1840 A mm	WAR3222 900 Lx 500 Px 1840 A mm	WAR3290G 900 Lx 500 Px 1840 A mm	WAR3291 900 Lx 500 Px 1840 A mm	WAR3390 900 Lx 500 Px 1840 A mm
WAR3220 1200 Lx 480 Px 1840 A mm	WAR3292 1200 Lx 500 Px 1840 A mm	WAR3220G 1200 Lx 500 Px 1840 A mm	WAR3221 1200 Lx 500 Px 990 A mm	WAR3320 1200 Lx 500 Px 1840 A mm

WAC902 LOCK FOR DOOR

WAC908 LOCK FOR GLASS DOORS

LOW UNDER BENCH CABINETS

CERTIFIED EN 14727 BY BUREAU VERITAS

Structure with central divider and waterproof chipboard doors class E1 as to formaldehyde emission, coated on both sides with fireproof plastic melamine laminate CLASS 1 with scratch-resistant quartz finishing made of sheets of kraft paper impregnated with phenolic resin, an upper decorative light grey (other colours on request) sheet of paper impregnated with melamine resin, exposed to the combined action of pressure and heat.

Rounded shockproof ABS edging of grey color, 3 mm thick. They can be supplied in class « 0 » execution made of steel coated with anti-acid epoxy paint. Doors with hinges with 168° opening.

Steel handles coated with epoxy paint light grey color with passage through heating tunnel at 180 °C.

Sliding safety glasses with aluminum rail profile and silvery guide, carriages with skids, shelves with adjustable height. Support frame made of steel painted with epoxy powders with passage through heating tunnel at 180 °C.

CERTIFIED EN 16121 SEVERA BY BUREAU VERITAS



LOW CABINETS



GLASS DOOR	PLAIN DORS	OPEN
-	WAR3111 600 Lx 500 P x 990 A mm	-
WAR3090 900 Lx 480 P x 990 A mm	WAR3191 900 Lx 500 P x 990 A mm	WAR3191G 900 Lx 480 P x 990 A mm
WAR3020 1200 Lx 480 P x 990 A mm	WAR3121 1200 Lx 500 P x 990 A mm	WAR3121G 1200 Lx 480 P x 990 A mm

WAC902 serratura per anta

WAC908 serratura per cristalli

TOPS CABINETS

CERTIFIED EN 14727 BY BUREAU VERITAS

Made of waterproof particleboard panel coated with fireproof F1 HPL plastic melamine laminate. Rounded shockproof ABS edging, 3 mm thick.

Sliding safety glasses with aluminum rail profile and silvery guide, carriages with skids, 2 shelves with adjustable height. They can be supplied in class « 0 » execution made of steel coated with anti-acid epoxy paint.

Swing doors with 168° opening made of particleboard panel coated with fireproof F1 laminate HPL.

Rounded shockproof ABS edging, 3 mm thick. 6 shelves with adjustable height.

The topo can be supplied in class "0" execution made of steel coated with anti-acid epoxy paint.

CERTIFICATO EN 16121 SEVERA OF BUREAU VERITAS



TOPS

GLASS DOORS	PLAIN DOORS	OPEN
-	WSP3061 600 Lx 500 P x 685 A mm -	WSP3061G 600 Lx 500 P x 685 A mm -
WSP3090 900 Lx 480 P x 685 A mm	WSP3091 900 Lx 500 P x 685 A mm	WSP3091G 900 Lx 500 P x 685 A mm
WSP3020 1200 Lx 480 P x 685 A mm	WSP3021 1200 Lx 500 P x 685 A mm	WSP3021G 1200 Lx 500 P x 685 A mm

WAC902 Lock for doors

WAC908 lock for glass doors

SUSPENDED CABINAT

Structure with central partition and doors in wood chipboard hydrofuge class E1 with regard to the emission of formaldehyde, coated on both sides with fire-retardant melamine plastic laminates1 scratch-resistant quartz finish consisting of sheets of kraft paper impregnated with phenolic resin, with a white top decorative sheet (other colors on request) impregnated with melamine resin, subjected to the combined action of pressure and heat.

White shock-proof perimeter edging, rounded 3 mm thick. In three different versions: open, with sliding safety crystals with aluminum rail profile silver guide, blind doors with handles in steel coated with anti-acid epoxy paints

Doors with hinges opening 168 in order to avoid contact with the other doors if placed side by side, but allow to have the entire internal surface completely available without any hindrance.

Shelves with adjustable height. Aluminum handles.

Shelves with adjustable height. Aluminum handles.

The EN versions have the right dimensions to be inserted between the columns of the risers

CERTIFICATO EN 16121 SEVERA OF BUREAU VERITAS



SUPENDED CABINETS



GLASS SUSPENDED CABINET	PLAIN SUSPENDED CABINET	OPEN SUSPENDED CABINET	GLASS CENTRAL SUSPENDED CABINET
WAR3507EN 840 L x 300 P x 640 A mm	WAR3507ENP 840 L x 300 P x 640 A mm	WAR3507ENG 840 L x 300 P x 640 A mm	-
WAR3507 900 L x 300 P x 640 A mm	WAR3507P 900 L x 300 P x 640 A mm	WAR3507G 900 L x 300 P x 640 A mm	-
WAR3501EN 1140 L x 300 P x 640 A mm	WAR3501ENP 1140 L x 300 P x 640 A mm	WAR3501ENG 1140 L x 300 P x 640 A mm	WAR3551EN 1140 L x 300 P x 640 A mm
WAR3501 1200 L x 300 P x 640 A mm	WAR3501P 1200 L x 300 P x 640 A mm	WAR3501G 1200 L x 300 P x 640 A mm	-
WAR3505EN 1440 L x 300 P x 640 A mm	WAR3505ENP 1440 L x 300 P x 640 A mm	WAR3505ENG 1440 L x 300 P x 640 A mm	WAR3555EN 1440 L x 300 P x 640 A mm
WAR3505 1500 L x 300 P x 640 A mm	WAR3505P 1500 L x 300 P x 640 A mm	WAR3505G 1500 L x 300 P x 640 A mm	-
WAR3502EN 1740 L x 300 P x 640 A mm	WAR3502ENP 1740 L x 300 P x 640 A mm	WAR3502ENG 1740 L x 300 P x 640 A mm	WAR3552EN 1740 L x 300 P x 640 A mm
WAR3508 1800 L x 300 P x 640 A mm	WAR3508P 1800 L x 300 P x 640 A mm	WAR3508G 1800 L x 300 P x 640 A mm	-

WAC902 Lock for plain doors – **WAC908** lock for glass door – **WAC918L** LED light

METAL CABINET

Made of press-formed steel sheet thickness 8/10 which is suitably reinforced with 12/10 mm elements, painted standard grey RAL7035 or on request.

The back of the sides is of 40 mm with external rounded corners.

The sliding doors sliding system is based on galvanized brackets equipped with ball bearings coated with nylon.










They are supplied with 4 shelves whose height can be adjusted. Tested by CATAS laboratory according to standards UNI.

METALLIC CABINET

PLAIN SLIDING DOORS	GLASS SLIDING DOORS
ARM1002 1200 L x 450 P x 2000 A mm (GREY RAL 7035)	ARM1012 1200 L x 450 P x 2000 A mm (GREY RAL 7035)
WARM1002 1200 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)	WARM1012 1200 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)
ARM1004 1500 L x 450 P x 2000 A mm (GREY RAL 7035)	ARM1014 1500 L x 450 P x 2000 A mm (GREY RAL 7035)
WARM1004 1500 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)	WARM1014 1500 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)
ARM1006 1800 L x 450 P x 2000 A mm (GREY RAL 7035)	ARM1016 1200 L x 450 P x 2000 A mm (GREY RAL 7035)
WARM1006 1800 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)	WARM1016 1200 L x 450 P x 2000 A mm (PURE WHITE RAL 9010)

ARM1020 LOCK FOR SLIDING DOORS





TECNICHNICAL SEATING

They comply with the standards in force; they are tested by CATAS Laboratory. Gas lift system, five-way base with non-slip feet.



CHAIRS



SE122 Upholstered chair with armrests covered with fabric	SE122S Upholstered chair with armrests covered with PVC	SE122P Chair with armrests made of polyurethane foam with backrest	SE121 Upholstered chair without armrests covered with fabric	SE111 Upholstered chair with 4 legs covered with fabric
---------------------------------------------------------------------	-------------------------------------------------------------------	------------------------------------------------------------------------------	------------------------------------------------------------------------	-------------------------------------------------------------------



STOLES



SE141F High stool made of beech with backrest	SE142 High upholstered stool covered with fabric with backrest	SE142S High upholstered stool covered with PVC with backrest	SE142P High stool made of polyurethane foam with backrest	SE131 High stool covered with beech without backrest	SE132 High stool covered with fabric without backrest	SE151 High stool covered with beech without backrest	SE152 High stool covered with fabric without backrest
---------------------------------------------------------	--------------------------------------------------------------------------	------------------------------------------------------------------------	---------------------------------------------------------------------	----------------------------------------------------------------	-----------------------------------------------------------------	----------------------------------------------------------------	-----------------------------------------------------------------

SAFETY FITTINGS


EMERGENCY SHOWER AND EYES WASH

EMERGENCY SHOWERS AND EYEWASHES

They are manufactured according to standards CE – DIN12899 – UNI9608; they are characterized by a high water flow with a soft jet allowing washing immediately the body parts accidentally hit by aggressive products.

They are essential in all high-risk environments, they can be easily identified thanks to their red color (or green on request) and to a suitable signal according to the standards in force.

EMERGENCY SHOWERS AND EYEWASHES

				
AF410 Wall emergency shower	AF410 Extractable eye emergency shower	AF440 Wall eye washer with basin	AF460 Pedestal mounted eye washer with basin	AF420 Emergency shower with eye washer

All contents (photos, drawings, trademarks, texts, etc...) are the exclusive property of

ASEM!. Srl.

It is absolutely forbidden the disclosure and reproduction even partial, as well as the use without the written consent of

ASEM. Srl. same.

We reserve the right to make technical changes without prior notice, depending on developments in standards and technology.

April 2021



ASEM S.r.l.



Via Peschiera, 53/A - 31032 Casale sul Sile (TV) - Italy



+39 0422 785536 - Fax +39 0422 827135



info@atcasem.it



www.atcasem.it

